Job: Approval: Type:



Ø1 3/4" Ring Mount MODEL DL2 12V 4W, COB LED w/ Driver

Specifications:

Material

Available in machined 6061-T6 aluminum or C36000 brass. All hardware 18-8 stainless steel

Body

Machined body with cast brass loop allows fixture to be hung from a chain, cable, or hook. (Hanging hardware not included). A molded high temperature silicone wire passthru prevents water from entering thru rear of body or around socket leads.

Cap

Machined cap threads onto body, allowing tool-less removal of cap, and is sealed to the body with a high temperature silicone O-ring. Accepts up to two internal accessories, held in place by a stainless steel clip.

Finish

TGIC thermo set polyester powder coat paint available in 14 standard colors. On aluminum model, finish is applied over a corrosion resistant, hexavalent chromium free, RoHS compliant coating. Aluminum model available in one additional metal finish: Clear Anodized. Brass model available in three additional metal finishes: Natural, Polished, and Aged.

1/8" thick, tempered, clear lens, secured to cap with a high temperature, curing, silicone adhesive.

Light Engine³

Integral Driver COB LED: COB LED light engine uses industry standard replaceable components for ease of field maintenance and future upgrades and includes features like: field changeable optics (18°, 24°, 36°, 60°), choice of color temperature (2700K, 3000K, 3500K, 4000K), CRI (80, 90), and an L70 > 40,000 hrs. Includes a field replaceable low voltage driver for 400lm nominal light output. Driver features include: 12VAC input (+/-10%), ELV and MLV phase dimming (contact V3 for dimmer compatibility), high power factor (> 0.9), and internal protection (short circuit, overload, thermal, auto-reset).


Certification


CSA tested & certified to US and Canadian safety standards for wet location use per

All ratings subject to change without notice. See website or contact V3 for most current

Adjustable Cutoff Accessory (See AC5 specification sheet fo more info. Order separately)




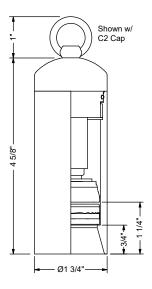

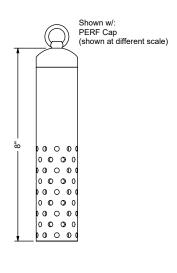



Ordering Information:

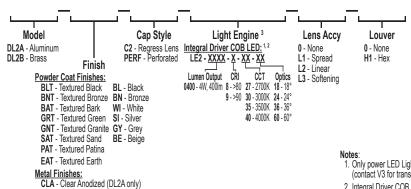

- Only power LED Light Engine options with approved transformers (contact V3 for transformer and dimmer compatibility info).
 - 2. Integral Driver COB LED Light Engine options do not require a separately specified remote driver. See specifications above for required voltage input.
 - 3. All lumen values cited are nominal lumen output (ideal lumen output of light engine only in lab conditions). Actual fixture output will vary with cap type, material, lens/optics options, and environmental conditions. For more accurate information, see fixture photometry files on website
 - 4. Specifications, certifications, and ordering information are subject to change. Please check website for latest specification sheets.

Example: DL2A - BL - C2 - LE2-400-8-30-60 - 0 - H1

NAT - Natural (DL2B only)

AGE - Aged (DL2B only)

POL - Polished (DL2B only)