
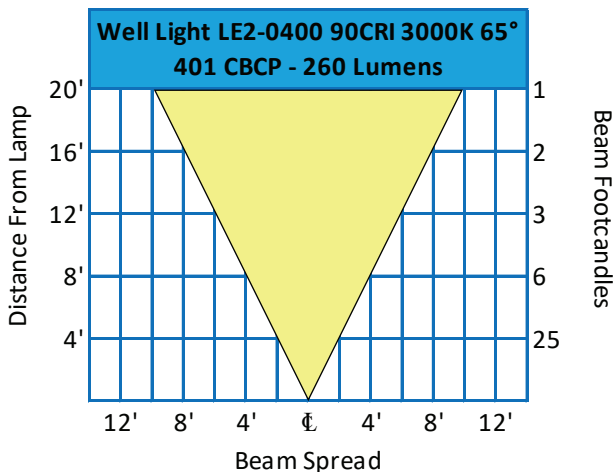
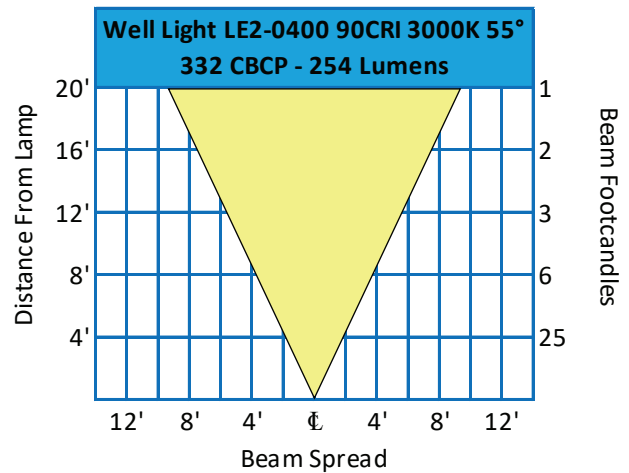
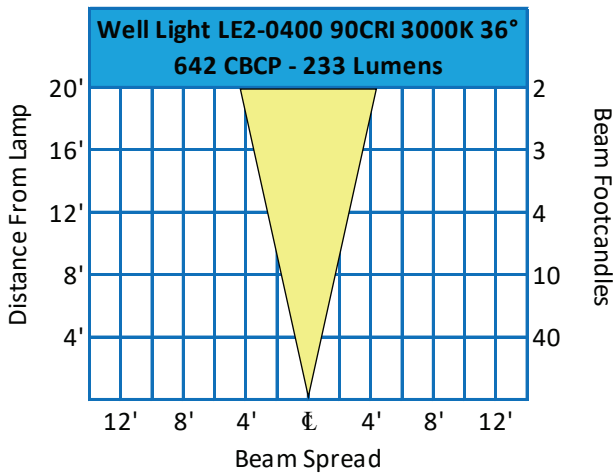
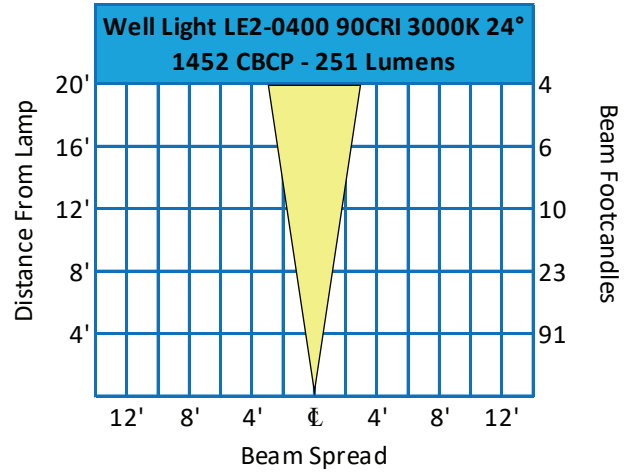


Photometric Overview

Information based on LE2-0400 90 CRI 3000K Light Engine. For more in depth photometric data, visit <https://www.vision3lighting.com/prod/sub/4/20/> or <https://www.vision3lighting.com/prod/sub/4/22/>

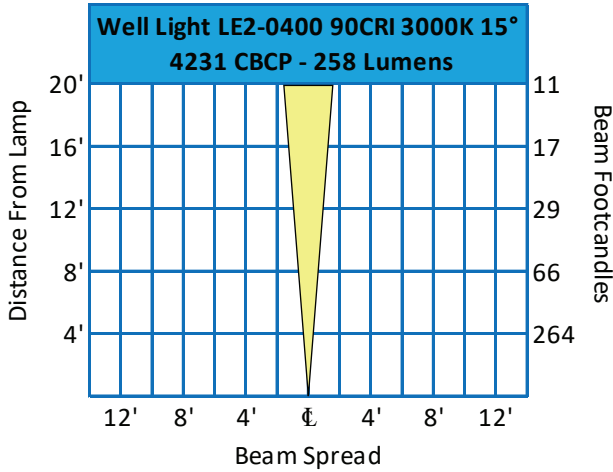






Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.12
	3000	1.14
	3500	1.19
	4000	1.22
>90	2700	0.96
	3000	1.00
	3500	1.05
	4000	1.07

Information subject to change without notice. See website or contact V3 for most current info.

Photometric Overview

Information based on LE2-0700 90 CRI 3000K Light Engine. For more in depth photometric data, visit <https://www.vision3lighting.com/prod/sub/4/20/> or <https://www.vision3lighting.com/prod/sub/4/22/>

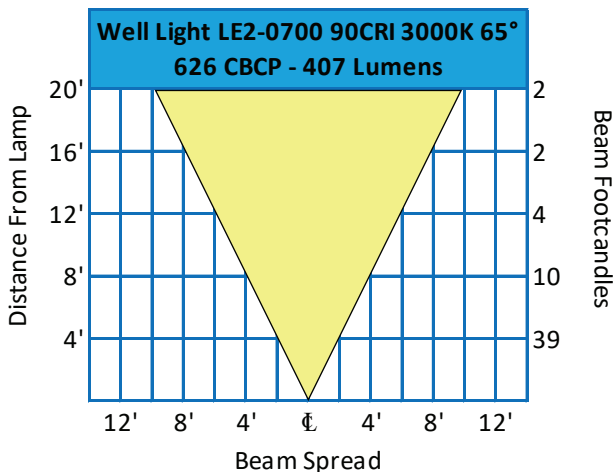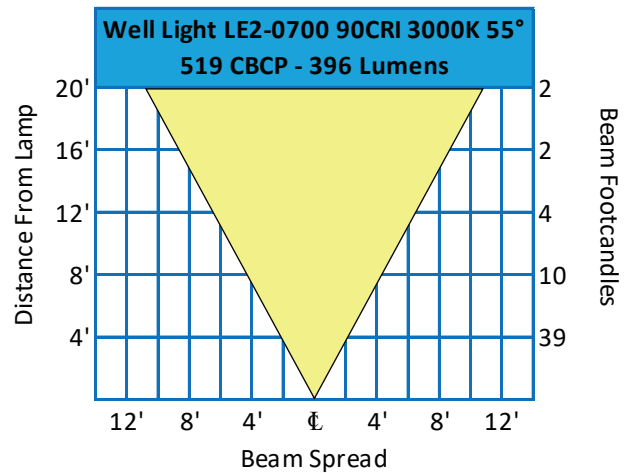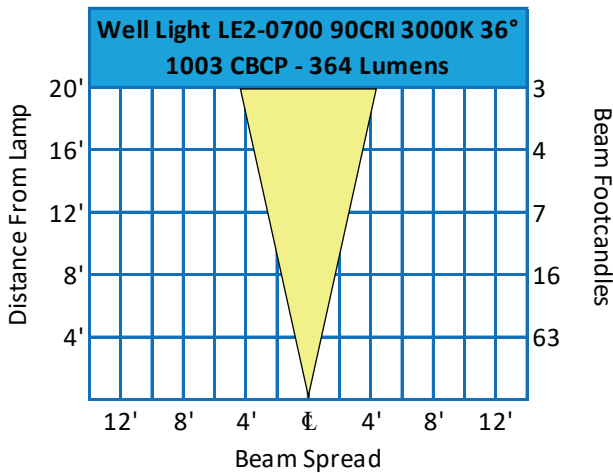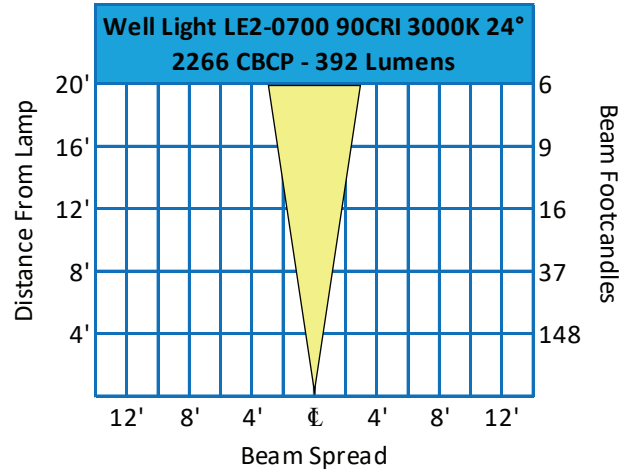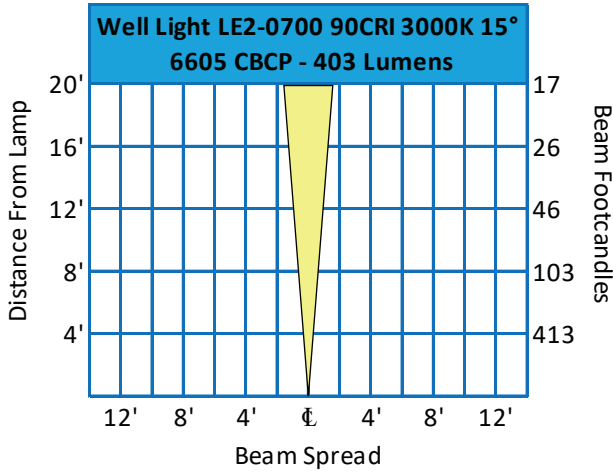






Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.12
	3000	1.14
	3500	1.19
	4000	1.22
>90	2700	0.96
	3000	1.00
	3500	1.05
	4000	1.07

Information subject to change without notice. See website or contact V3 for most current info.

Photometric Overview

Information based on LE2-1000 90 CRI 3000K Light Engine. For more in depth photometric data, visit <https://www.vision3lighting.com/prod/sub/4/20/> or <https://www.vision3lighting.com/prod/sub/4/22/>

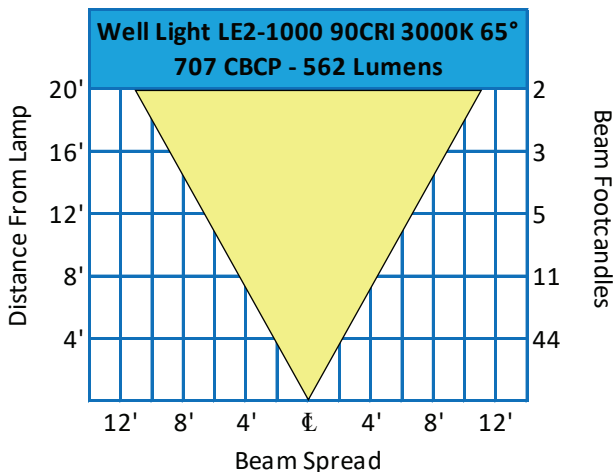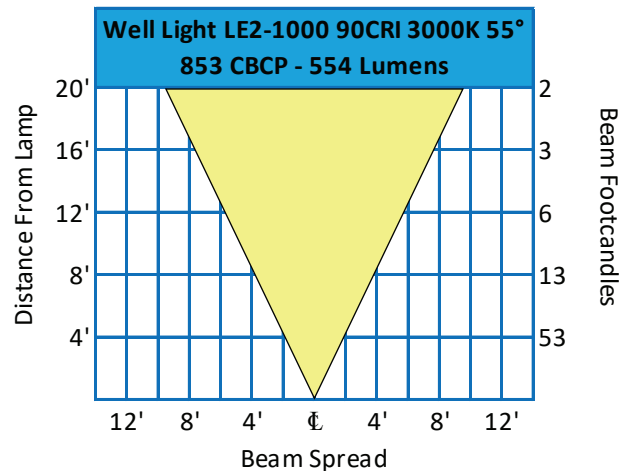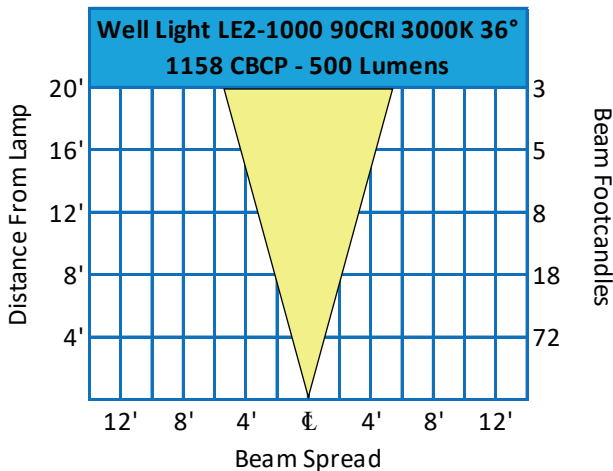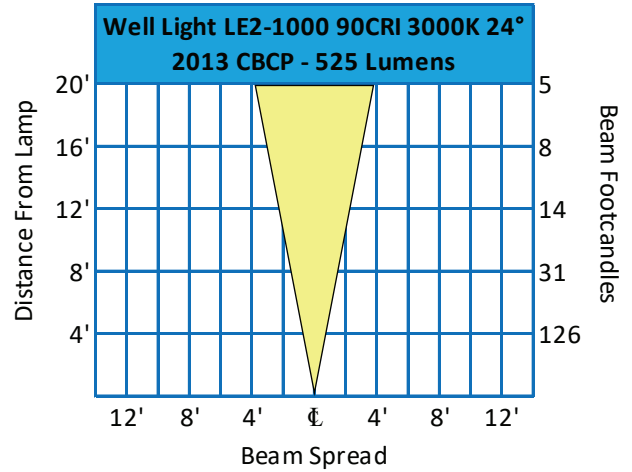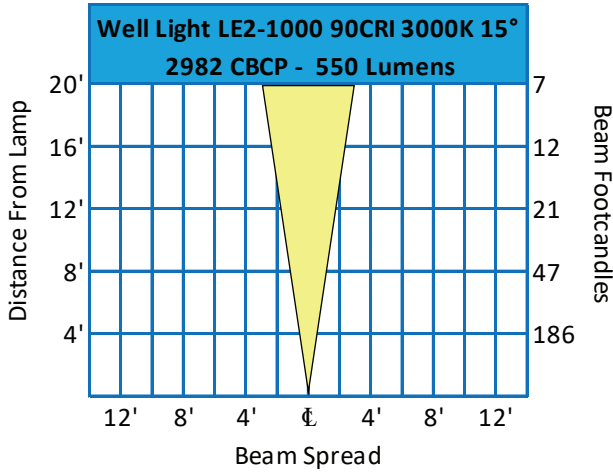

Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.09
	3000	1.14
	3500	1.16
	4000	1.18
>90	2700	0.94
	3000	1.00
	3500	1.02
	4000	1.06

Information subject to change without notice. See website or contact V3 for most current info.