
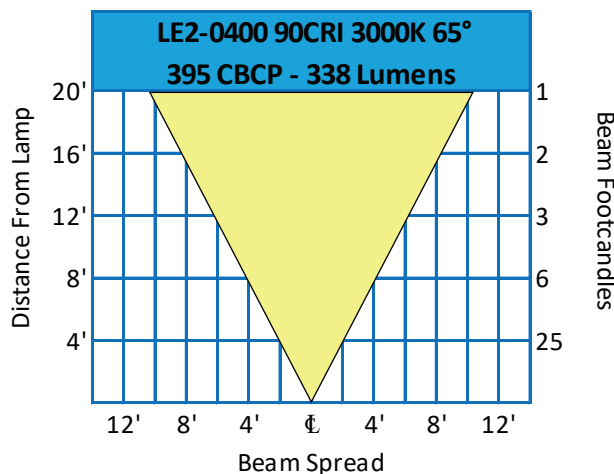
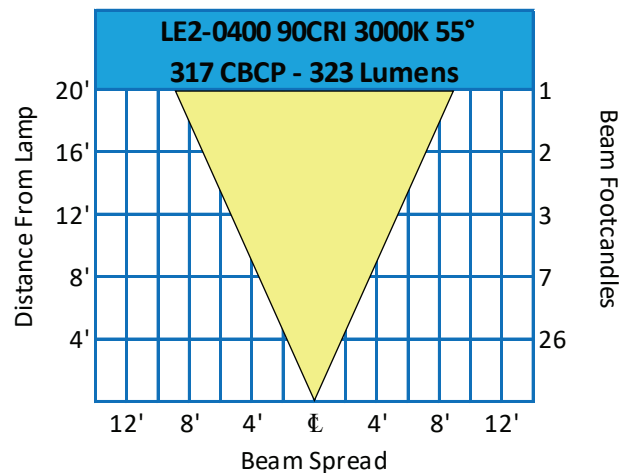
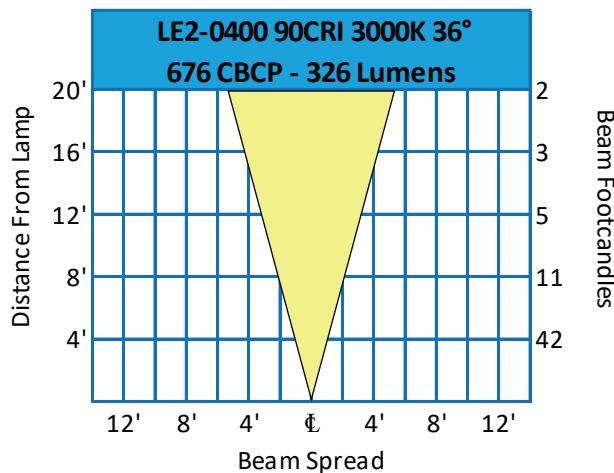
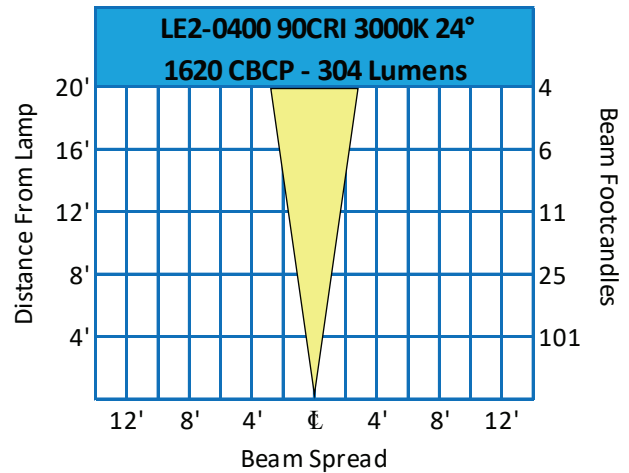


Photometric Overview

Information based on **LE2-0400 90CRI 3000K** Light Engine with **Standard (STD) Faceplate** option. For more in depth photometric data, visit website or contract Vision3 Lighting.

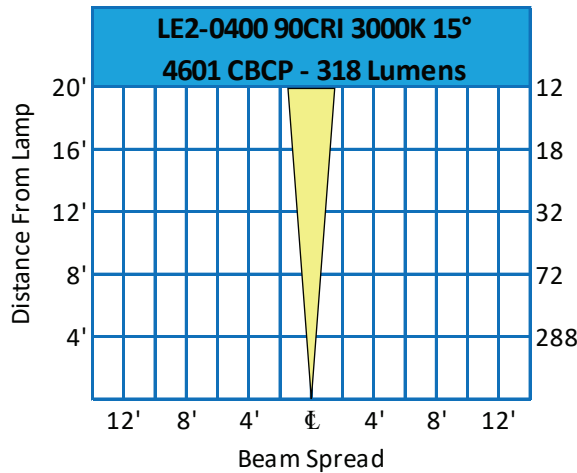






Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.12
	3000	1.14
	3500	1.19
	4000	1.22
>90	2700	0.96
	3000	1.00
	3500	1.05
	4000	1.07

Information subject to change without notice. See website or contact V3 for most current info.

Photometric Overview

Information based on **LE2-0700 90CRI 3000K** Light Engine with **Standard (STD) Faceplate** option. For more in depth photometric data, visit website or contract Vision3 Lighting.

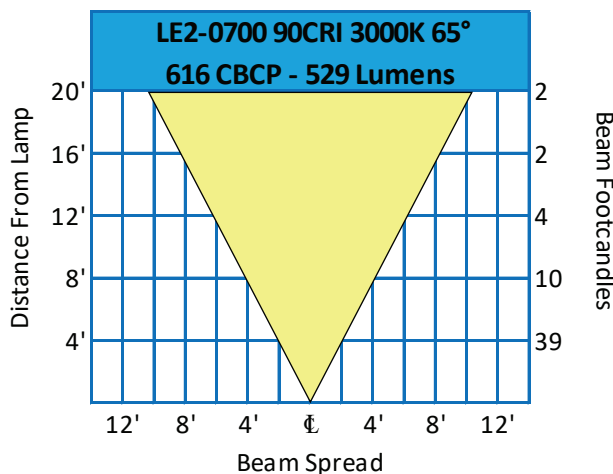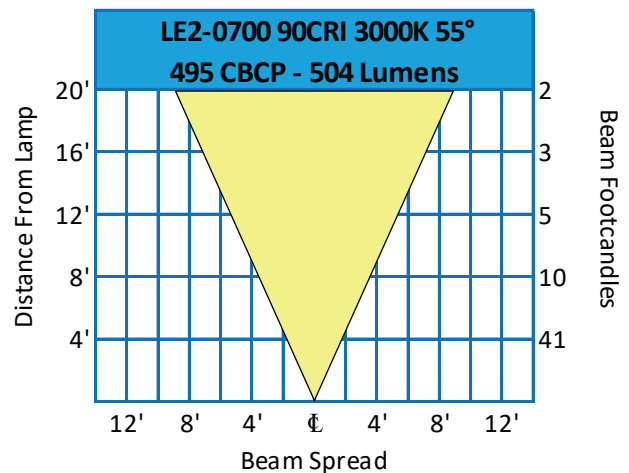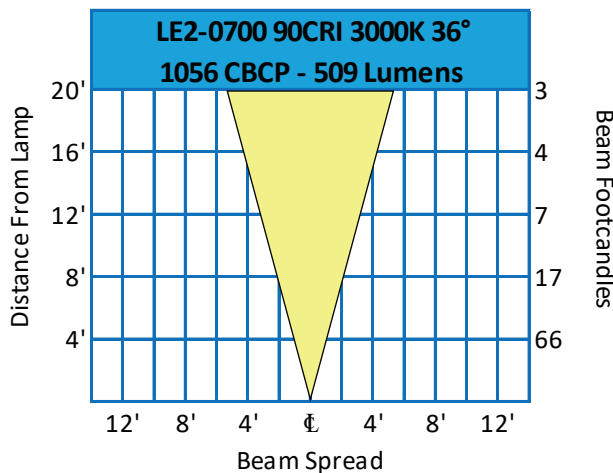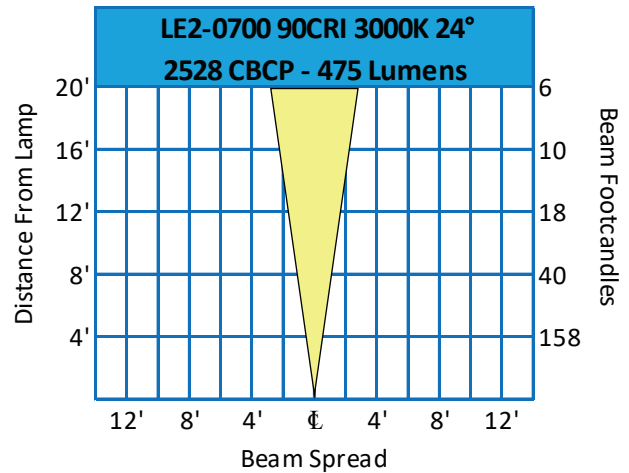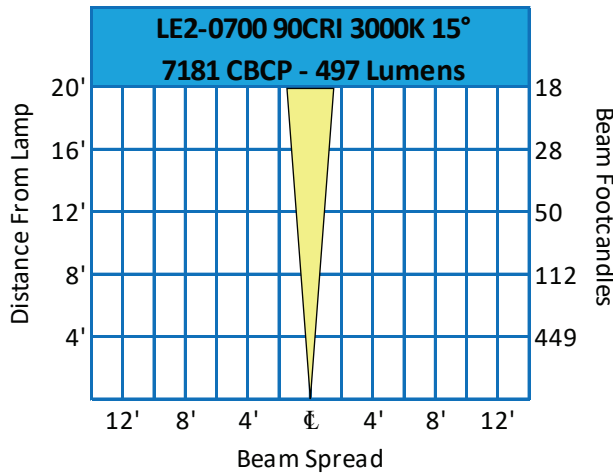






Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.12
	3000	1.14
	3500	1.19
	4000	1.22
>90	2700	0.96
	3000	1.00
	3500	1.05
	4000	1.07

Information subject to change without notice. See website or contact V3 for most current info.

Photometric Overview

Information based on **LE2-1000 90CRI 3000K** Light Engine with **Standard (STD) Faceplate** option. For more in depth photometric data, visit website or contract Vision3 Lighting.

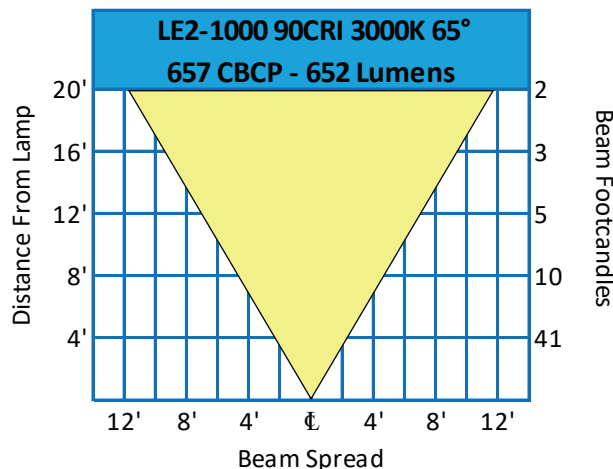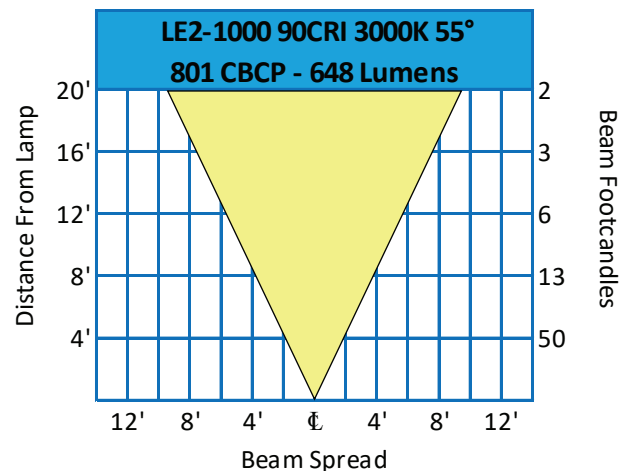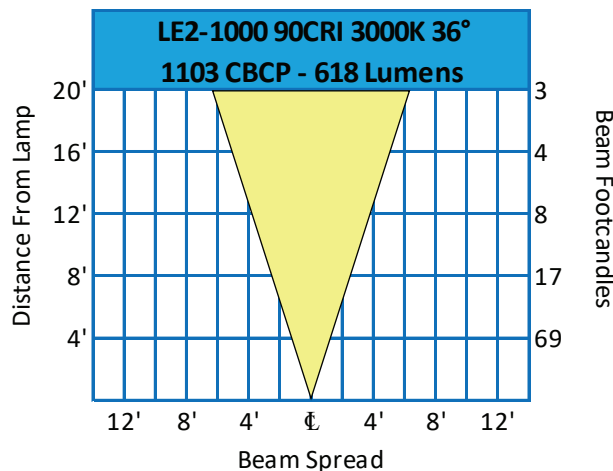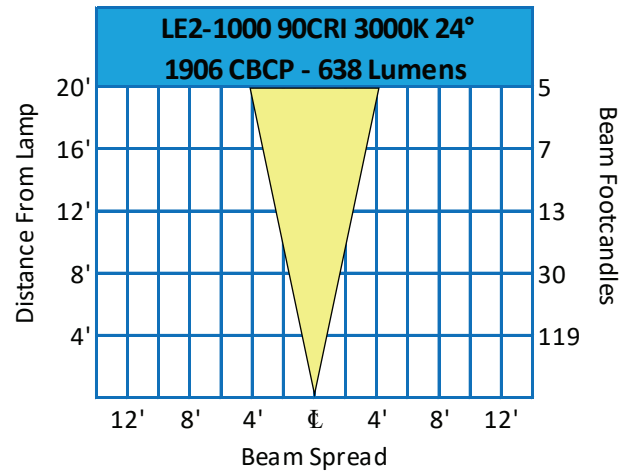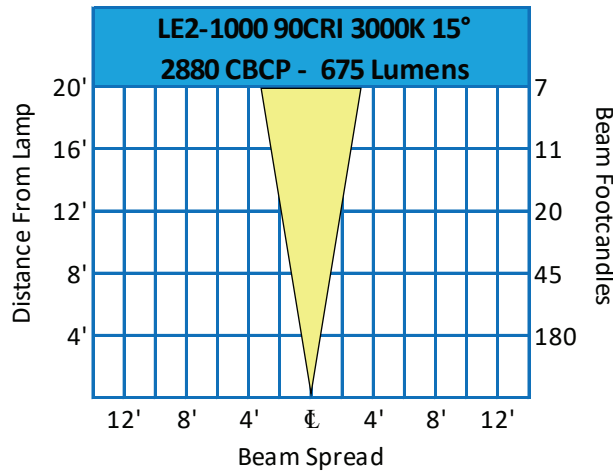

Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.09
	3000	1.14
	3500	1.16
	4000	1.18
>90	2700	0.94
	3000	1.00
	3500	1.02
	4000	1.06

Information subject to change without notice. See website or contact V3 for most current info.