


New Product Notice

MO2 In Grade Stake Mount

Precision cast and machined aluminum, brass, or bronze caps on thermoplastic housing for ground mounting of low voltage, line voltage, or remote driver lighting fixtures. Modular industry standard components allow for simple field maintenance and future upgrades. Certified for wet location applications, the MO2 ground mount is perfect for all residential and commercial landscape uses.

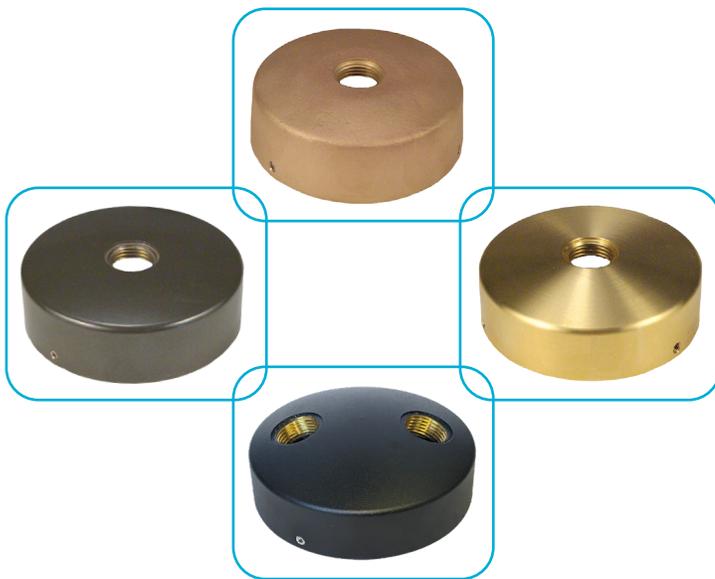

Features¹

- Industry standard driver / transformer components and wiring connectors used to simplify maintenance and future upgrades.
- Available with transformer for low voltage fixtures or single / dual LED drivers.
- Caps have radiused top to shed water and are available with single or dual mount holes.
- Fixed stem options allow fixture heights up to 48".
- Corrosion resistant thermoplastic housing is available in stake or junction style.
- Black anodized collar pressed into housing allows for solid mount and provides for water-tight seal with included O-ring.
- Tested and certified for wet location use in landscape applications.

Specifications¹

Transformer option:

- Input voltage: 120VAC.
- Output voltage: 12VAC.
- Power: 60W.
- Dimming³: ELV.
- Protection: short circuit.
- Suitable for AC LED or halogen loads.³

LED Driver options:

- Single or dual driver.
- Input voltage: 120-277VAC
- Output current (constant): 350mA, 500mA, or 700mA.
- Dimming³: 0-10V, forward-phase, & reverse-phase.
- Protection: over-current, no-load, short circuit, & over-temperature.

1. Features and Specifications subject to change without notice. Please see latest specification sheet(s) on website for latest information.
 2. Lumen Output (nominal) is ideal lumen output of light engine only in lab conditions. Actual fixture output will vary with fixture/cap type, material, lens/optics options, CRI, CCT, mounting, orientation, and environmental conditions. For more accurate information, see fixture photometry files on website.
 3. Contact Vision3 for compatibility and dimming range.