


## New Product Notice

### PA1 COB LED Path Light

Precision machined aluminum, brass, or stainless steel LED path lighting fixture with Integral Driver COB LED light engine and 12V or 120V mount options. Modular industry standard components allow for simple field replacement and future upgrades. Wet location capable and certified for landscape applications, the PA1 Path Light is perfect for all residential, commercial, retail, and hospitality path lighting uses.

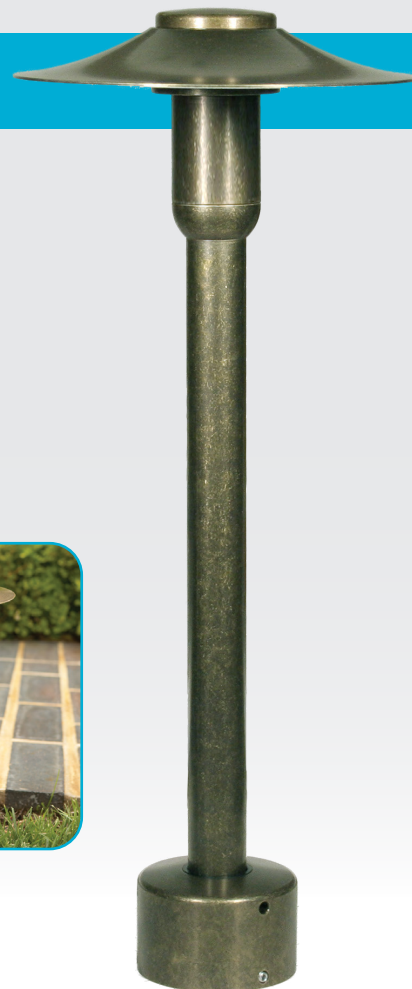

#### Features<sup>1</sup>

- Industry standard COB LED components and wiring connectors used to simplify maintenance and future upgrades.
- Field replaceable COB and driver.
- Available with various surface or landscape mount and voltage options.
- Top can be configured with various cap, shade, lens, and opening styles.
- T3/T4 halogen and retro-fit T3 LED lamp options also available.
- Stems available from 6" to 48".
- Tested and certified for wet location use in landscape mount applications.

#### Specifications<sup>1</sup>

##### Integral Driver COB LED

- Input voltage: 12VAC or 120VAC.
- Lumen Output (nominal)<sup>2</sup>: 400lm, 700lm, 1000lm.
- CCT: 2700K, 3000K, 3500K, 4000K.
- CRI: 80, 90.
- L70 > 40,000 hours.
- Dimming<sup>3</sup>: ELV & MLV phase dimming.

1. Features and Specifications subject to change without notice. Please see latest specification sheet(s) on website for latest information.  
2. Lumen Output (nominal) is ideal lumen output of light engine only in lab conditions. Actual fixture output will vary with fixture/cap type, material, lens/optics options, CRI, CCT, mounting, orientation, and environmental conditions. For more accurate information, see fixture photometry files on website.  
3. Contact Vision3 for dimmer compatibility and dimming range.