
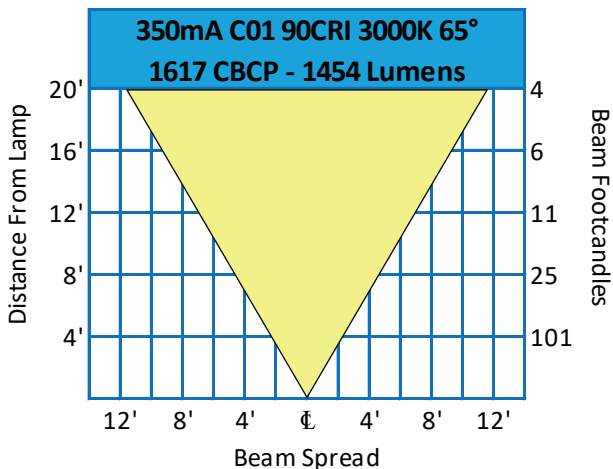
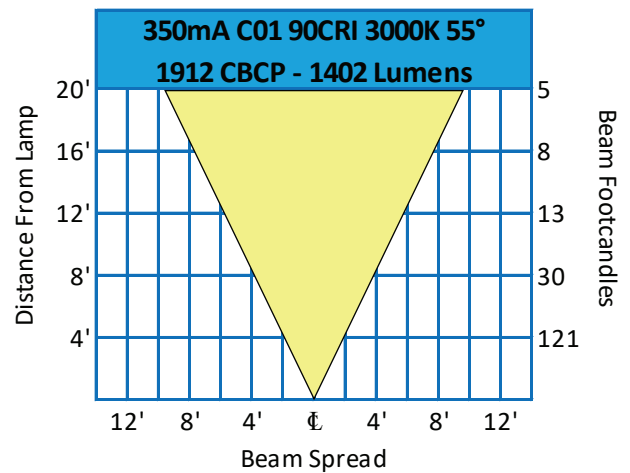
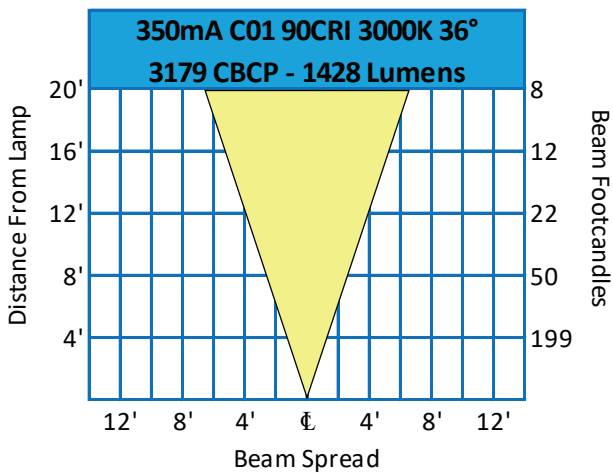
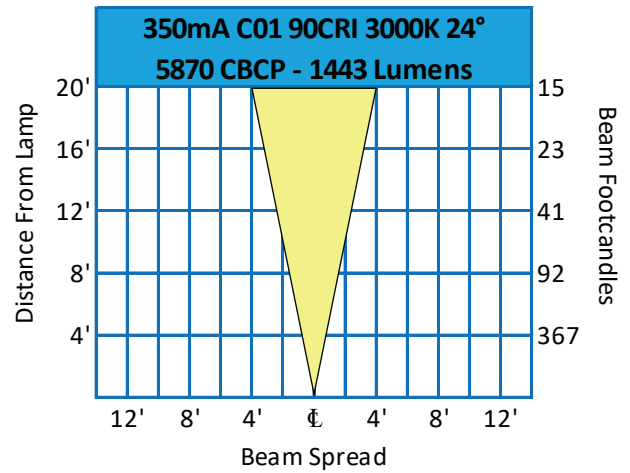


## Photometric Overview

Information for 350mA C01 90 CRI 3000K Light Engine. For more in depth photometric data, see website or contact Vision3 Lighting.

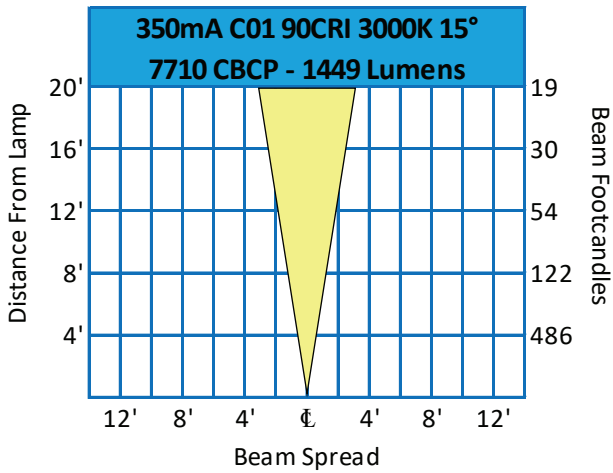






Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.09
	3000	1.14
	3500	1.16
	4000	1.18
>90	2700	0.94
	3000	1.00
	4000	1.06

Information subject to change without notice. See website or contact V3 for most current info.

## Photometric Overview

Information for 500mA C01 90 CRI 3000K Light Engine. For more in depth photometric data, see website or contact Vision3 Lighting.

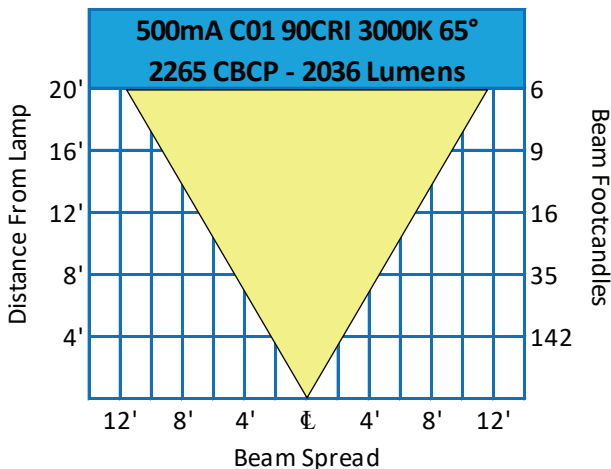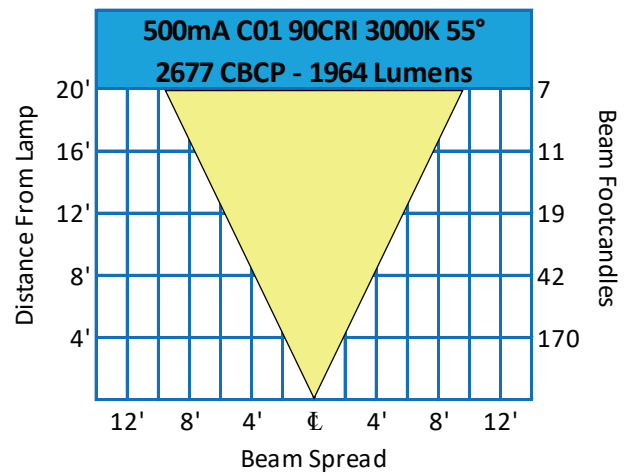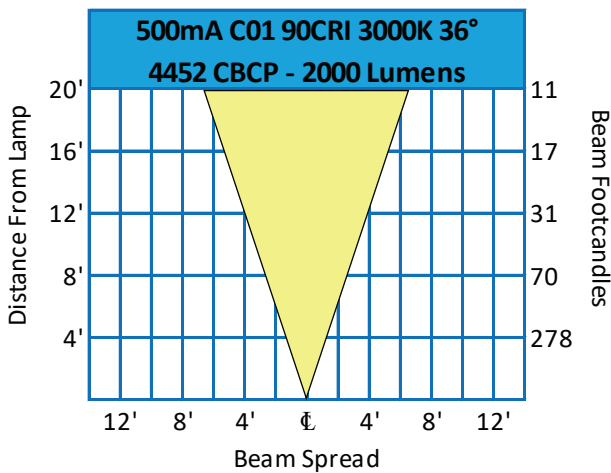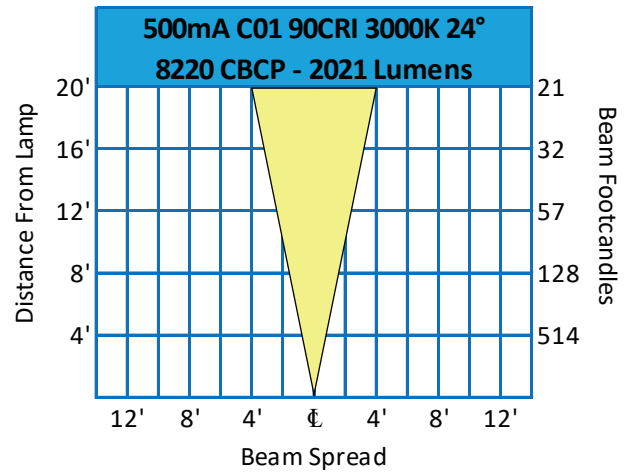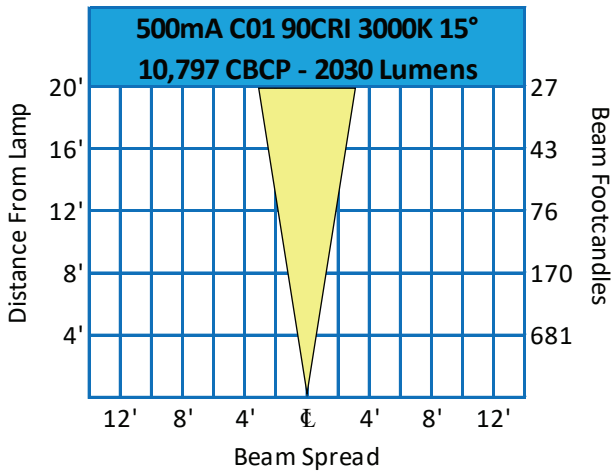






Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.09
	3000	1.14
	3500	1.16
	4000	1.18
>90	2700	0.94
	3000	1.00
	3500	1.02
	4000	1.06

Information subject to change without notice. See website or contact V3 for most current info.

## Photometric Overview

Information for 700mA C01 90 CRI 3000K Light Engine. For more in depth photometric data, see website or contact Vision3 Lighting.

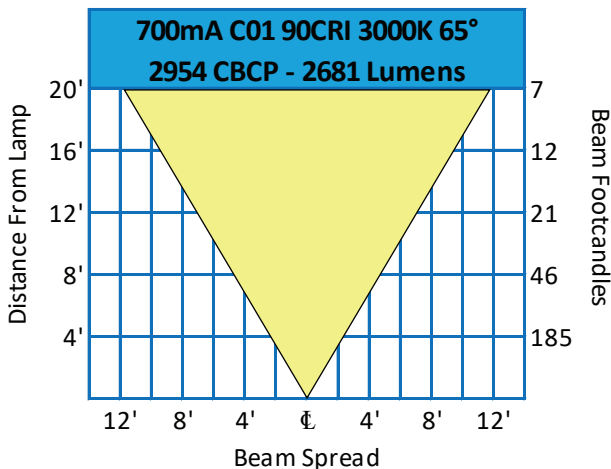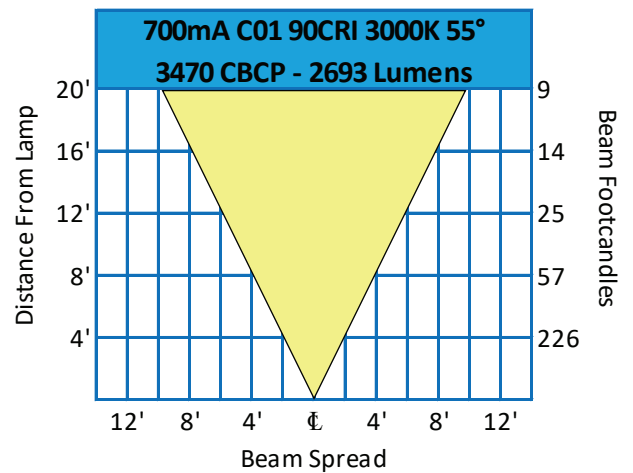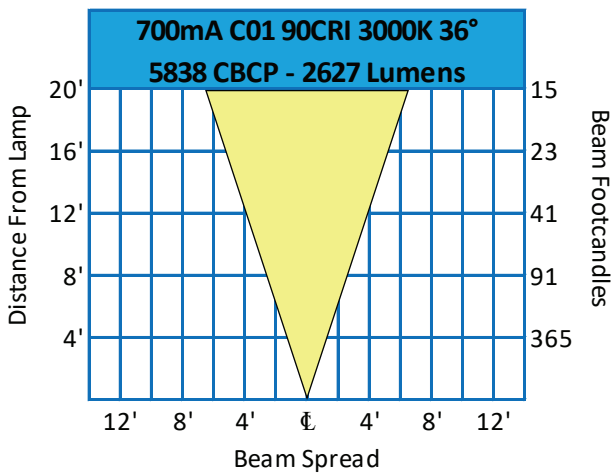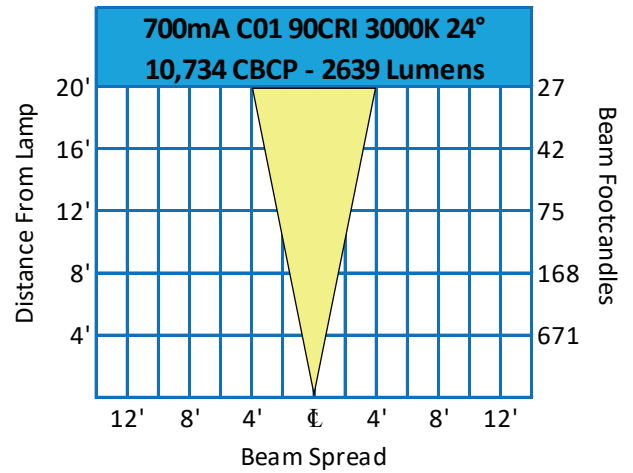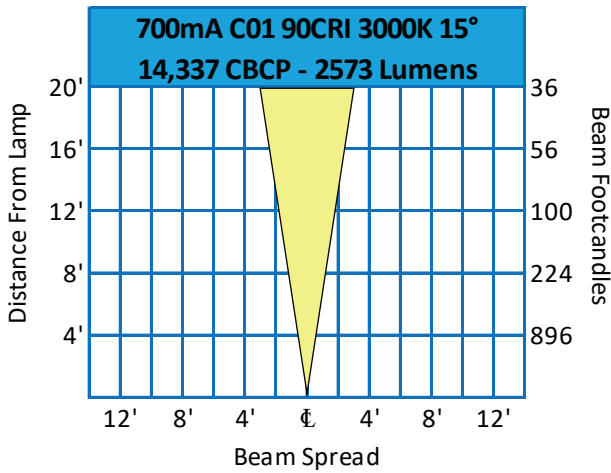






Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.09
	3000	1.14
	3500	1.16
	4000	1.18
>90	2700	0.94
	3000	1.00
	3500	1.02
	4000	1.06

Information subject to change without notice. See website or contact V3 for most current info.

## Photometric Overview

Information for 350mA C01 90 CRI 3000K Light Engine with C1 style cap. For more in depth photometric data, see website or contact Vision3 Lighting.

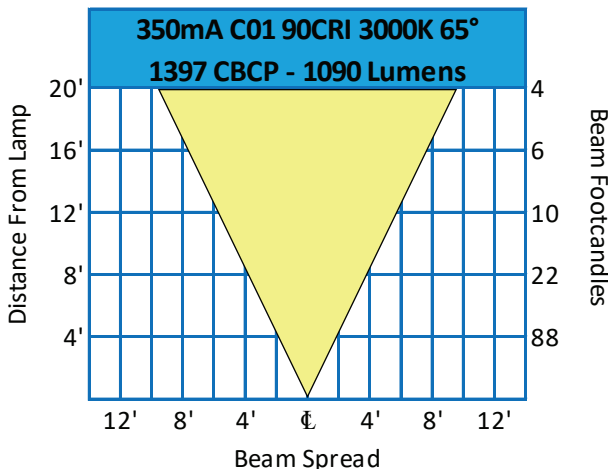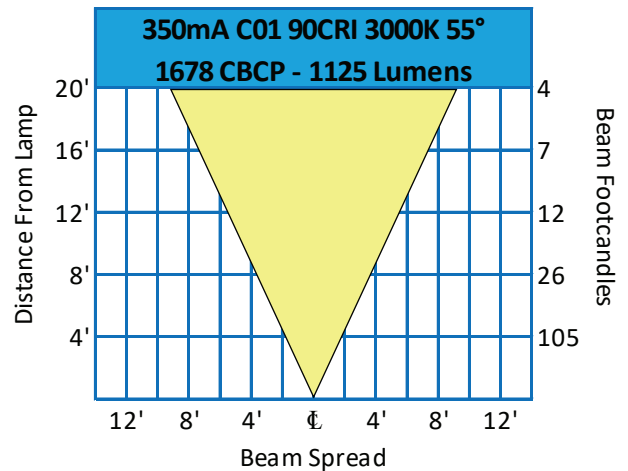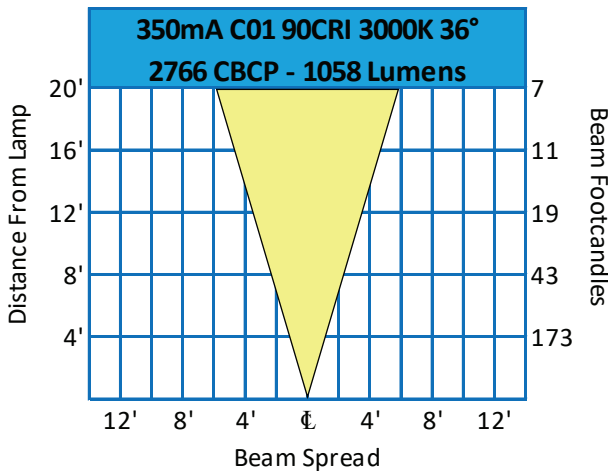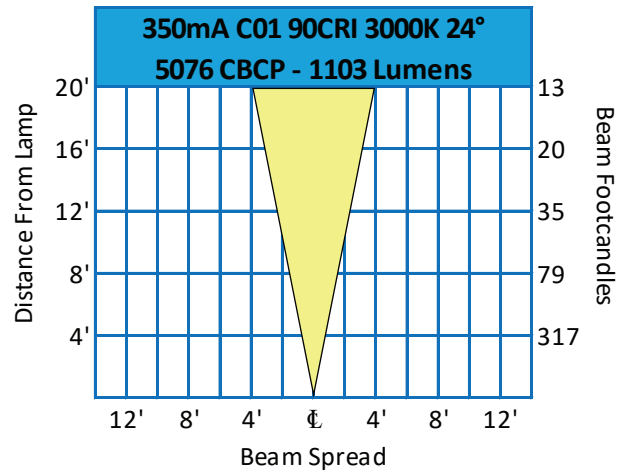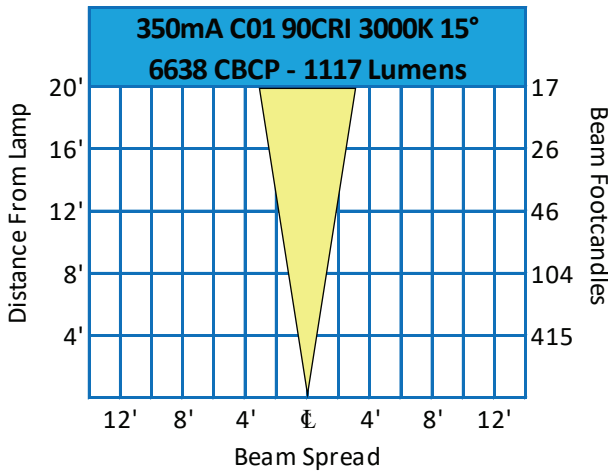






Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.09
	3000	1.14
	3500	1.16
	4000	1.18
>90	2700	0.94
	3000	1.00
	4000	1.06

Information subject to change without notice. See website or contact V3 for most current info.

## Photometric Overview

Information for 500mA C01 90 CRI 3000K Light Engine with C1 style cap. For more in depth photometric data, see website or contact Vision3 Lighting.

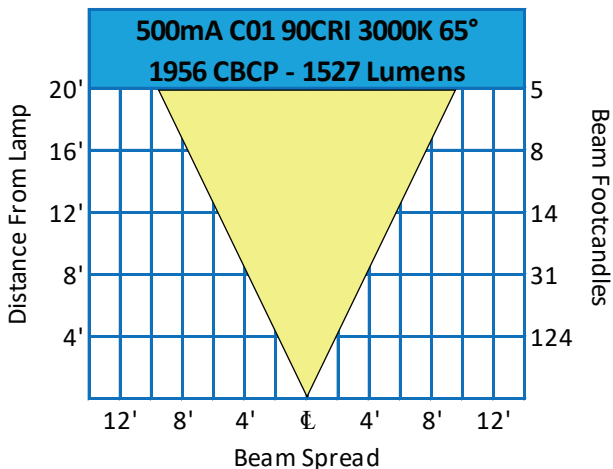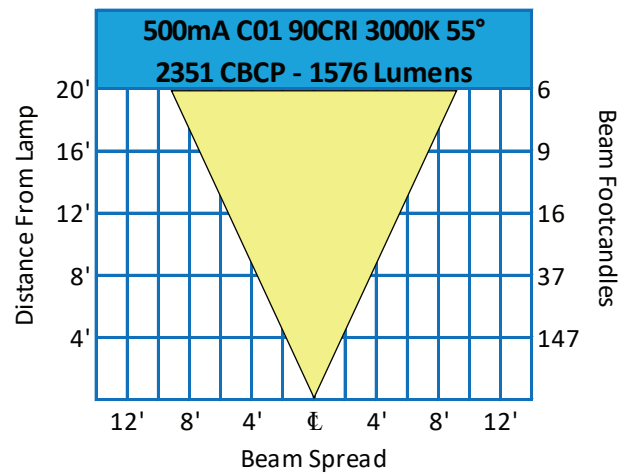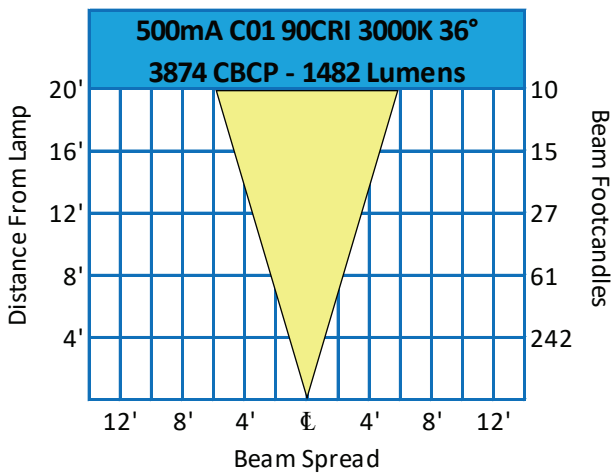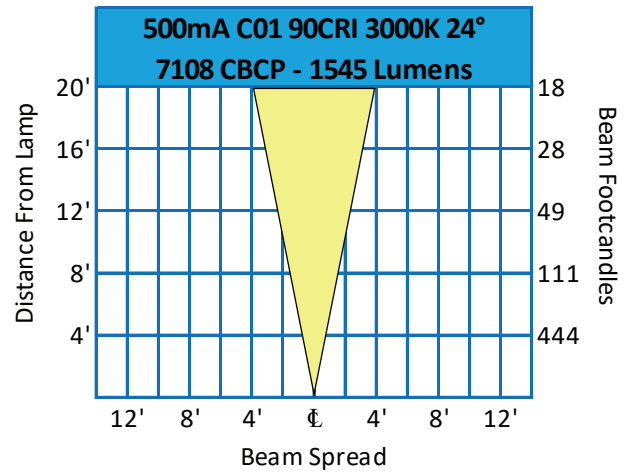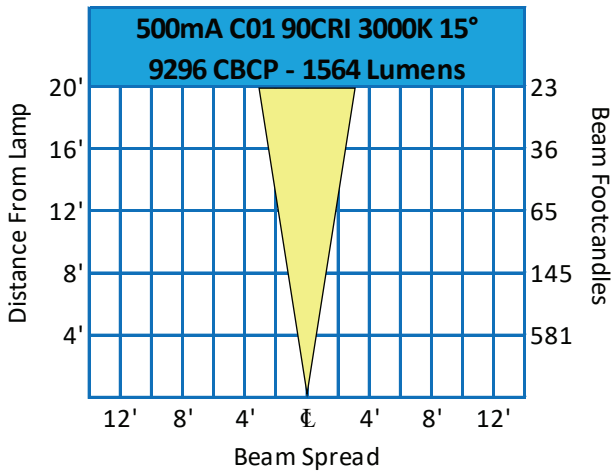






Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.09
	3000	1.14
	3500	1.16
	4000	1.18
>90	2700	0.94
	3000	1.00
	4000	1.06

Information subject to change without notice. See website or contact V3 for most current info.

## Photometric Overview

Information for 700mA C01 90 CRI 3000K Light Engine with C1 style cap. For more in depth photometric data, see website or contact Vision3 Lighting.

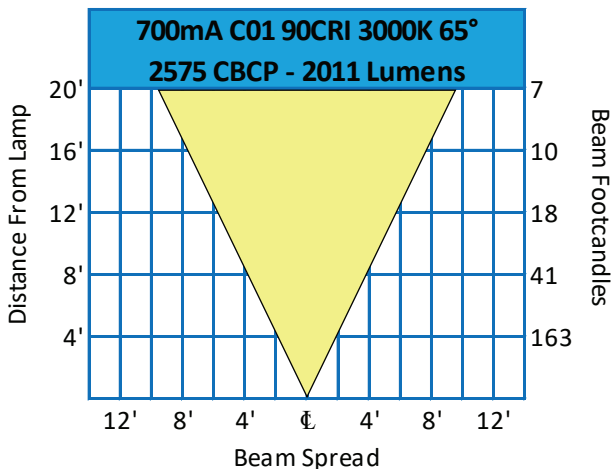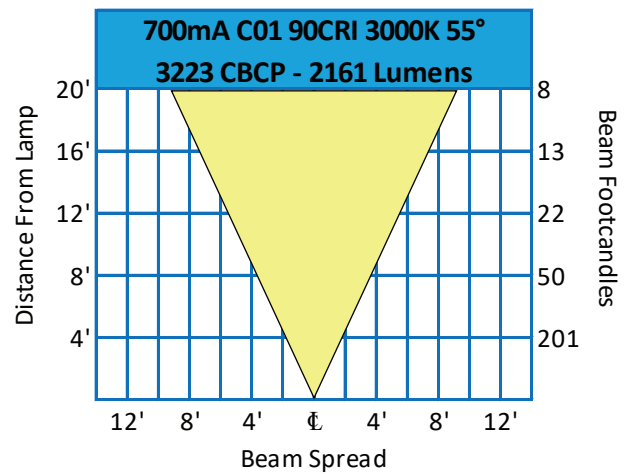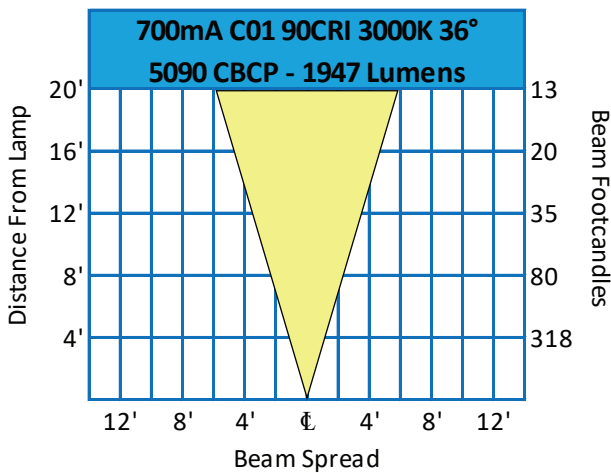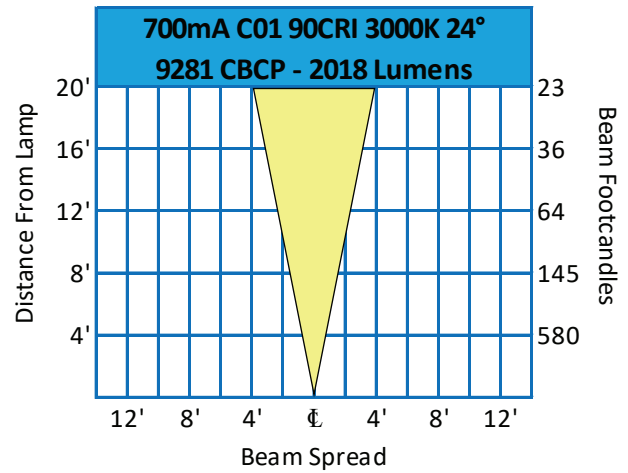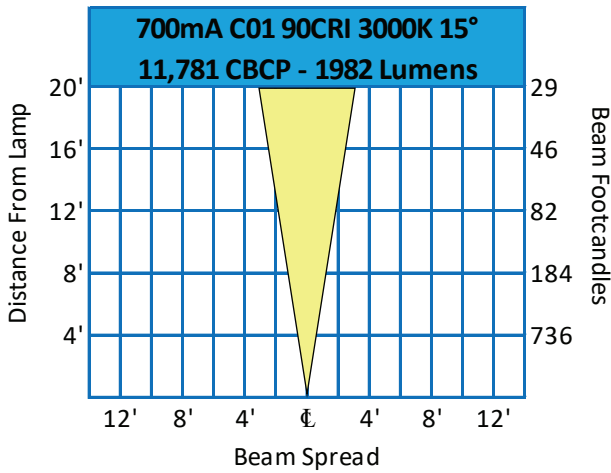






Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.09
	3000	1.14
	3500	1.16
	4000	1.18
>90	2700	0.94
	3000	1.00
	4000	1.06

Information subject to change without notice. See website or contact V3 for most current info.

## Photometric Overview

Information for 350mA C01 90 CRI 3000K Light Engine with C2 style cap. For more in depth photometric data, see website or contact Vision3 Lighting.

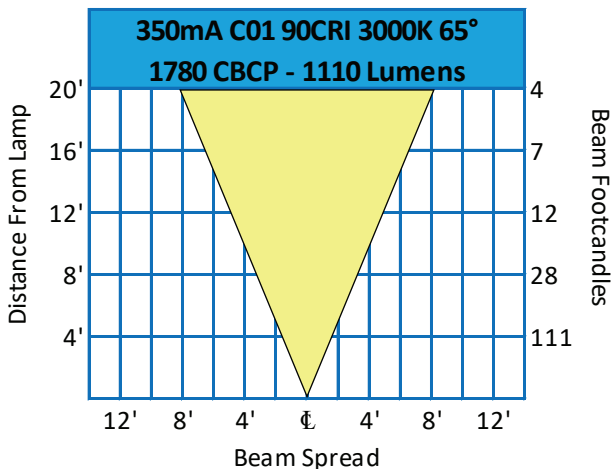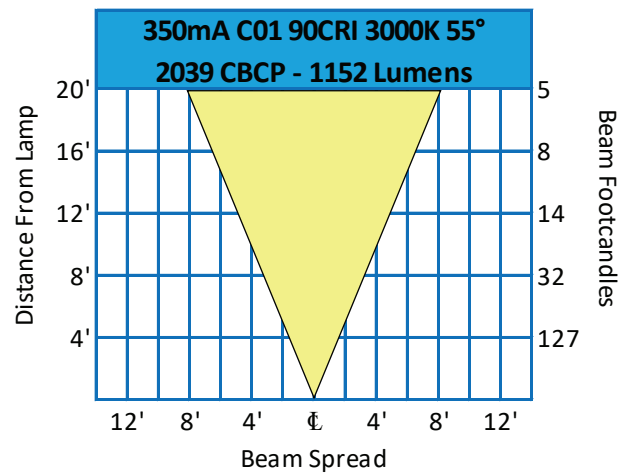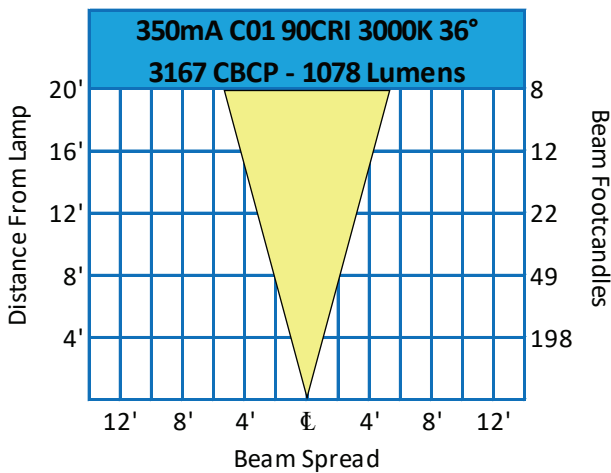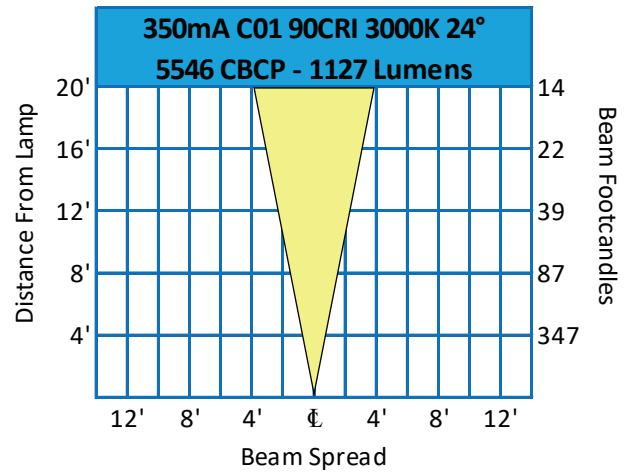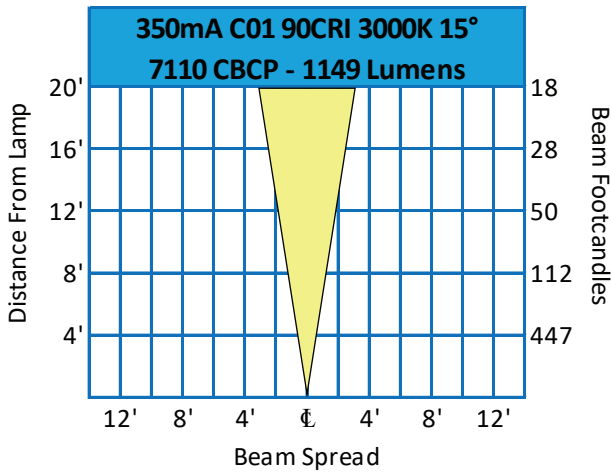






Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.09
	3000	1.14
	3500	1.16
	4000	1.18
>90	2700	0.94
	3000	1.00
	3500	1.02
	4000	1.06

Information subject to change without notice. See website or contact V3 for most current info.

## Photometric Overview

Information for 500mA C01 90 CRI 3000K Light Engine with C2 style cap. For more in depth photometric data, see website or contact Vision3 Lighting.

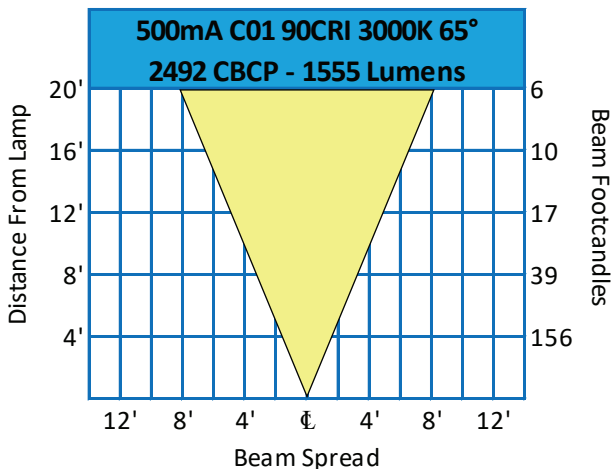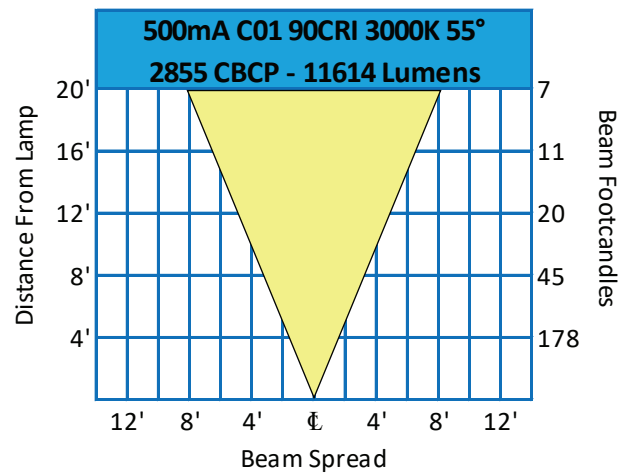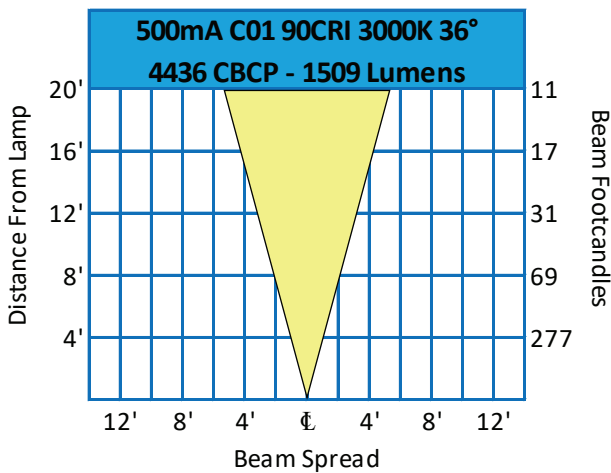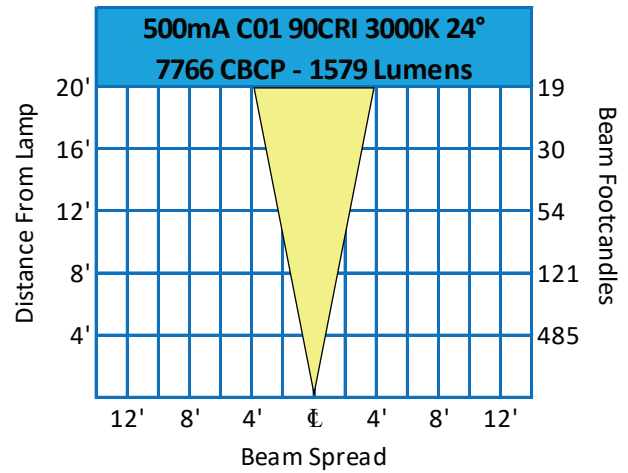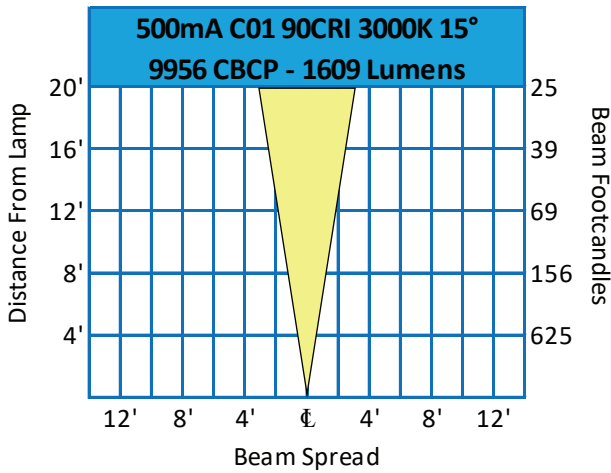

Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.






CRI	Color Temperature	Scaling Factor
>80	2700	1.09
	3000	1.14
	3500	1.16
	4000	1.18
>90	2700	0.94
	3000	1.00
	3500	1.02
	4000	1.06

Information subject to change without notice. See website or contact V3 for most current info.



## Photometric Overview

Information for 700mA C01 90 CRI 3000K Light Engine with C2 style cap. For more in depth photometric data, see website or contact Vision3 Lighting.

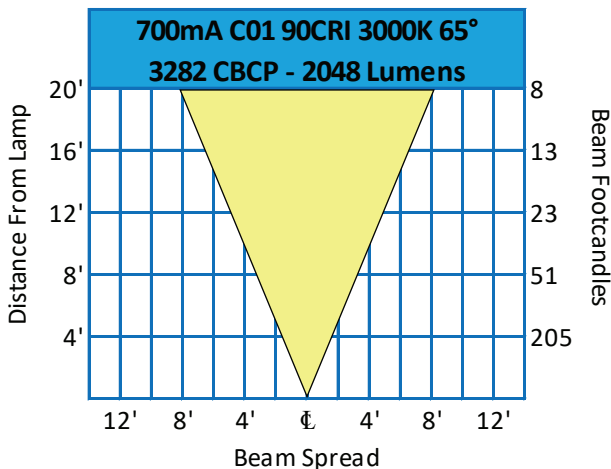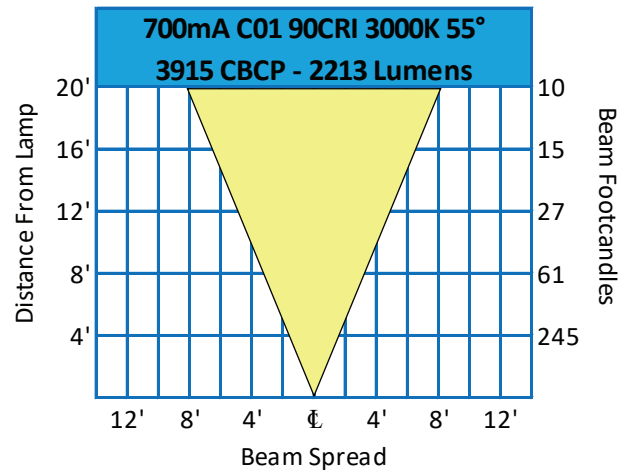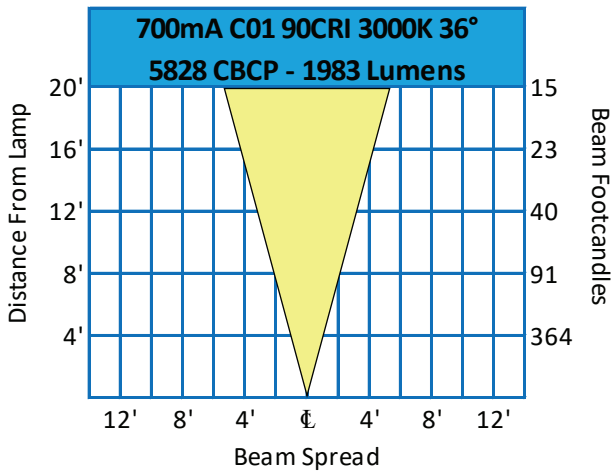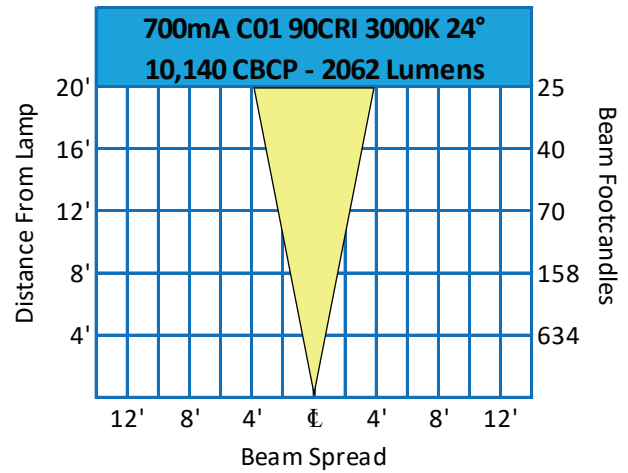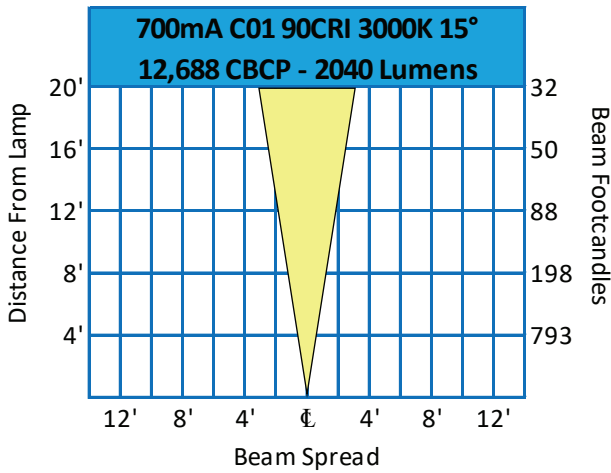






Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.09
	3000	1.14
	3500	1.16
	4000	1.18
>90	2700	0.94
	3000	1.00
	4000	1.06

Information subject to change without notice. See website or contact V3 for most current info.

## Photometric Overview

Information for 350mA C01 90 CRI 3000K Light Engine with C3 style cap. For more in depth photometric data, see website or contact Vision3 Lighting.

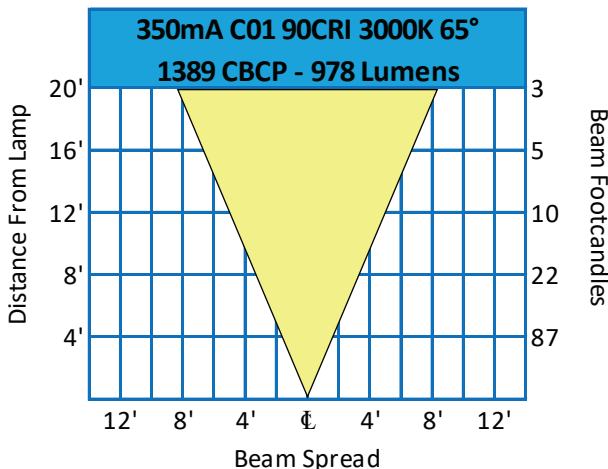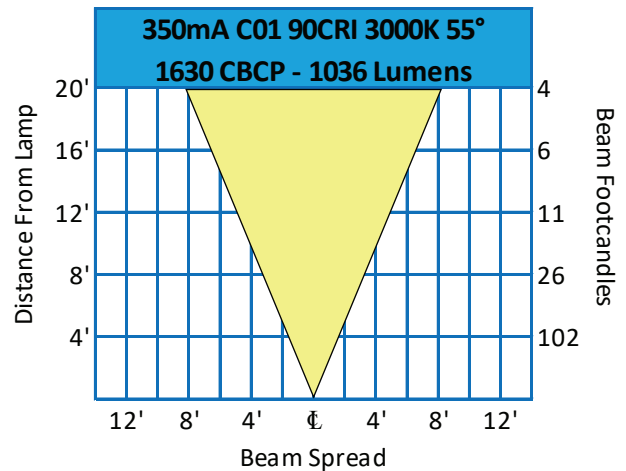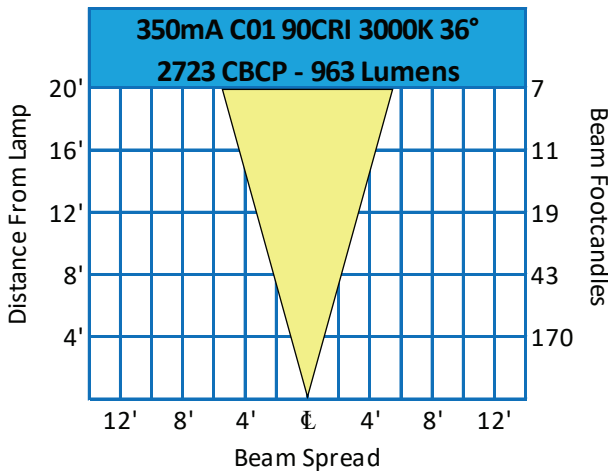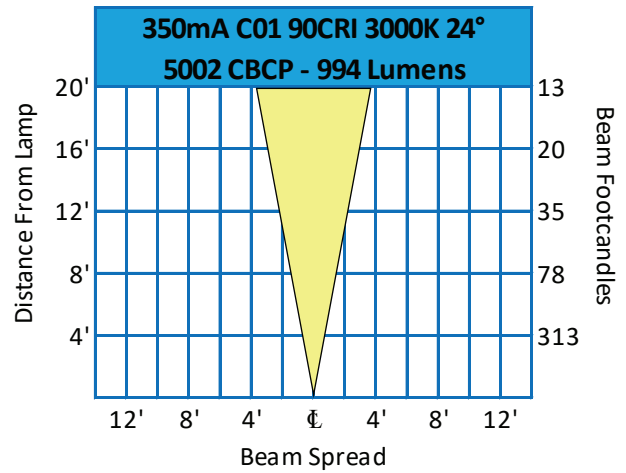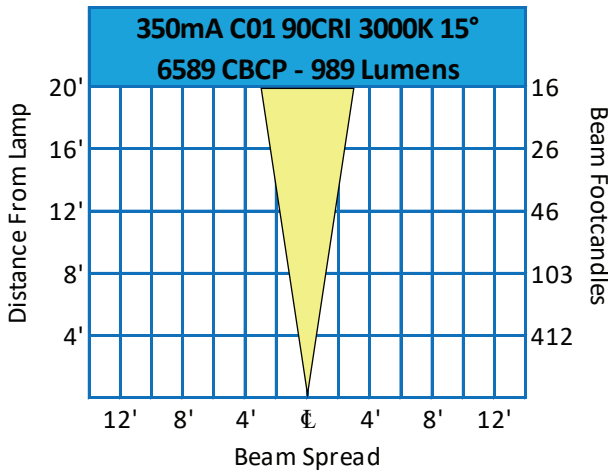






Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.09
	3000	1.14
	3500	1.16
	4000	1.18
>90	2700	0.94
	3000	1.00
	4000	1.06

Information subject to change without notice. See website or contact V3 for most current info.

## Photometric Overview

Information for 500mA C01 90 CRI 3000K Light Engine with C3 style cap. For more in depth photometric data, see website or contact Vision3 Lighting.

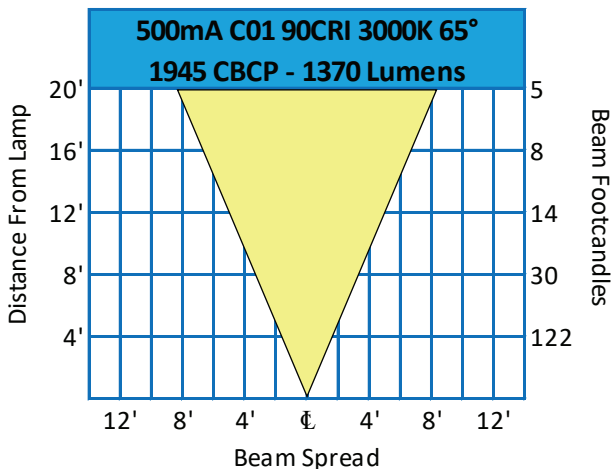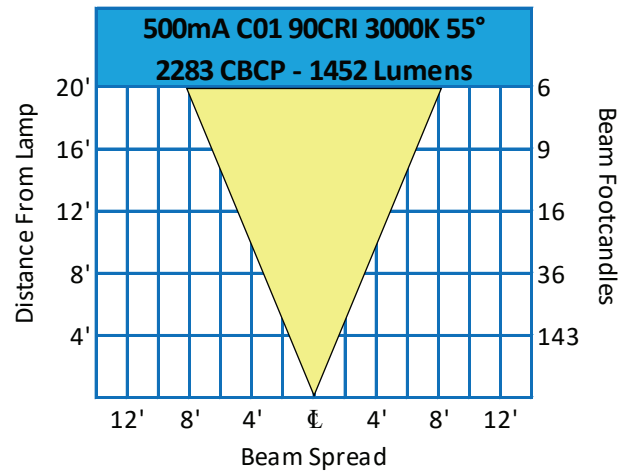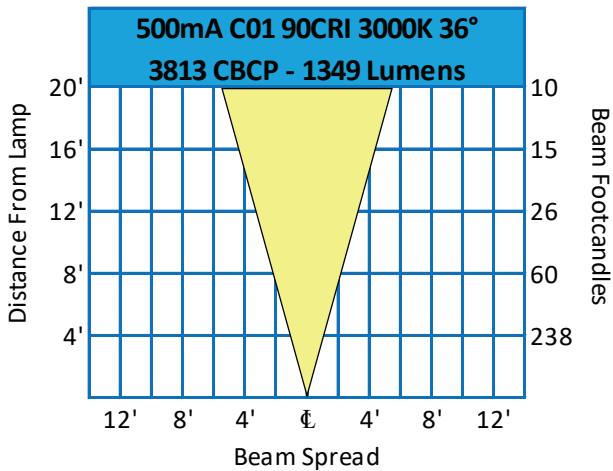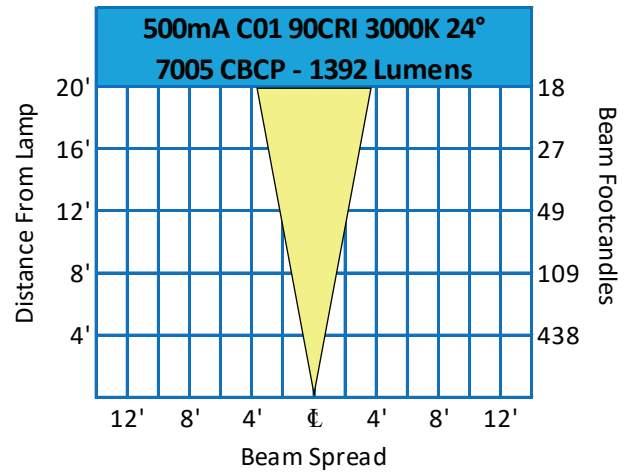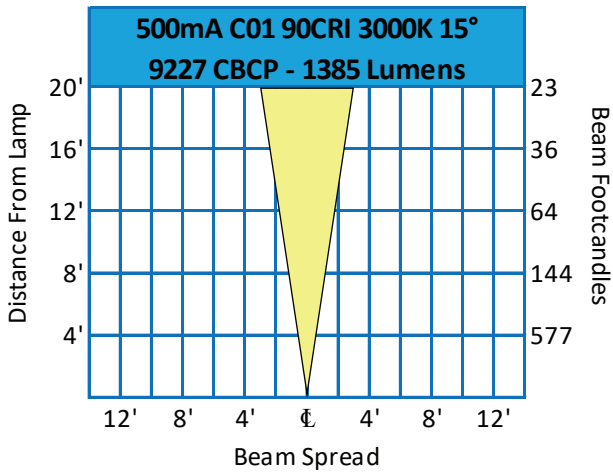






Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.09
	3000	1.14
	3500	1.16
	4000	1.18
>90	2700	0.94
	3000	1.00
	3500	1.02
	4000	1.06

Information subject to change without notice. See website or contact V3 for most current info.

## Photometric Overview

Information for 700mA C01 90 CRI 3000K Light Engine with C3 style cap. For more in depth photometric data, see website or contact Vision3 Lighting.

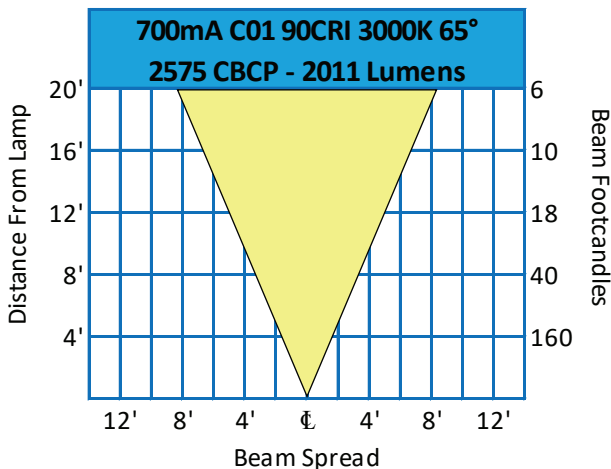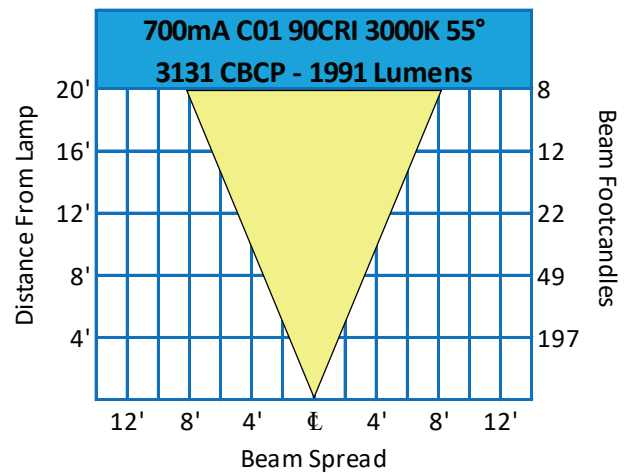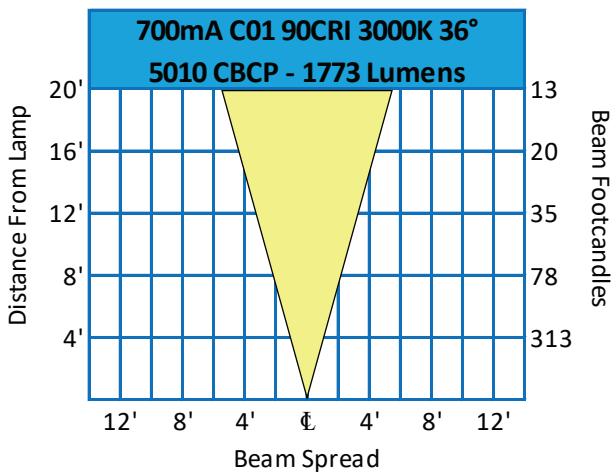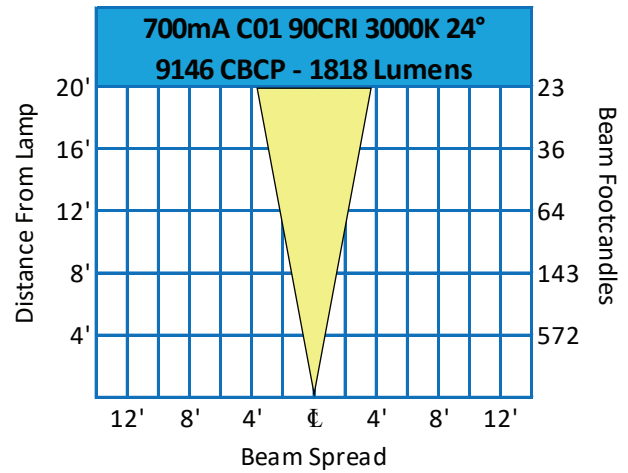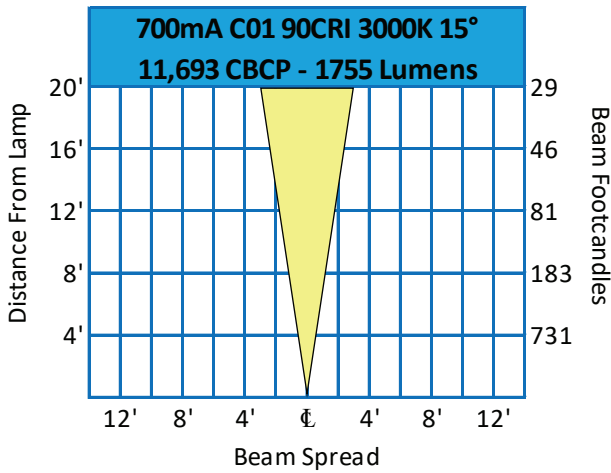






Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.09
	3000	1.14
	3500	1.16
	4000	1.18
>90	2700	0.94
	3000	1.00
	4000	1.06

Information subject to change without notice. See website or contact V3 for most current info.

## Photometric Overview

Information for 350mA C01 90 CRI 3000K Light Engine with C4 style cap. For more in depth photometric data, see website or contact Vision3 Lighting.

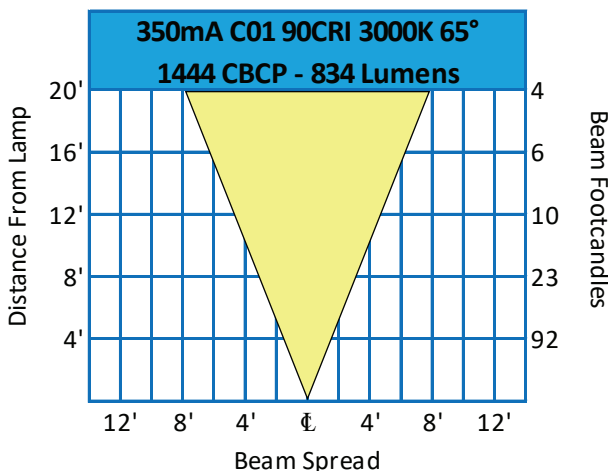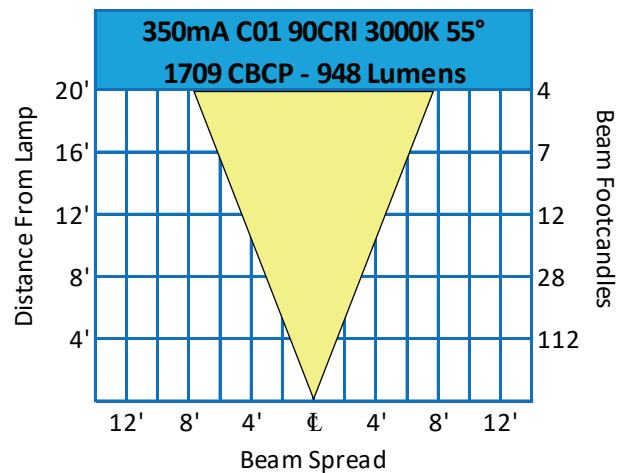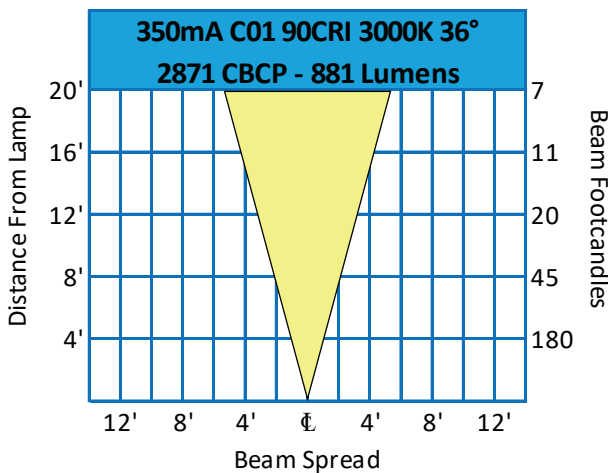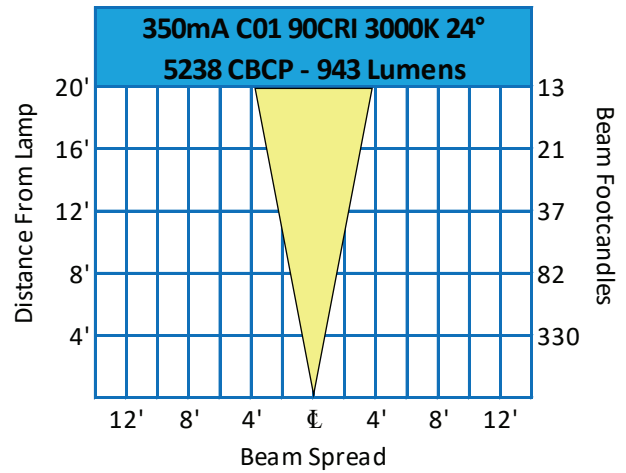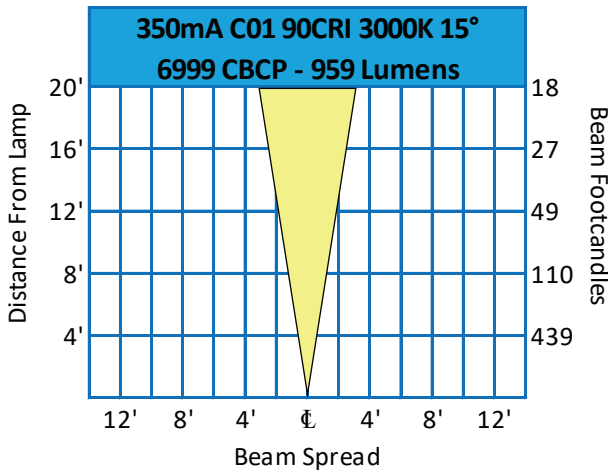






Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.09
	3000	1.14
	3500	1.16
	4000	1.18
>90	2700	0.94
	3000	1.00
	4000	1.06

Information subject to change without notice. See website or contact V3 for most current info.

## Photometric Overview

Information for 500mA C01 90 CRI 3000K Light Engine with C4 style cap. For more in depth photometric data, see website or contact Vision3 Lighting.

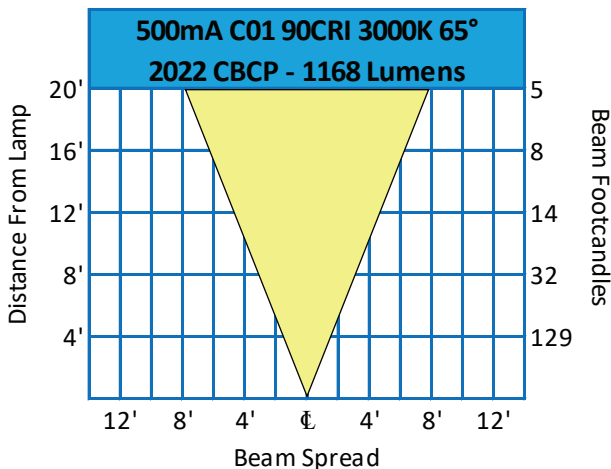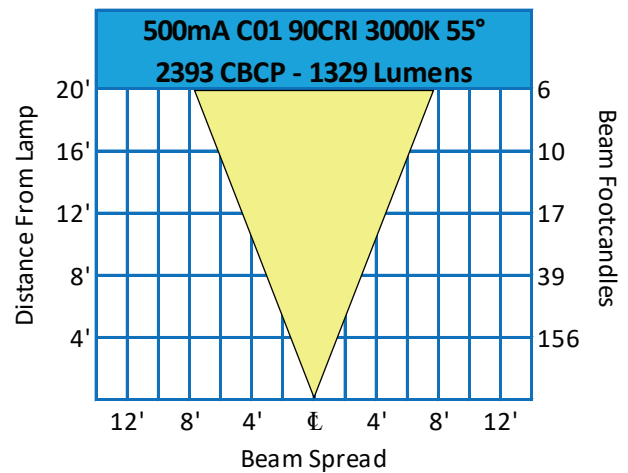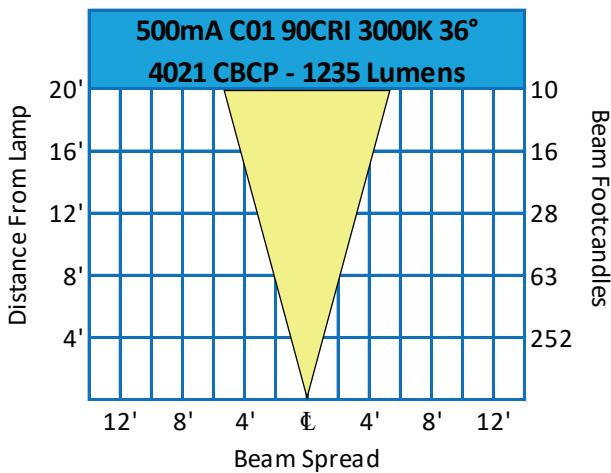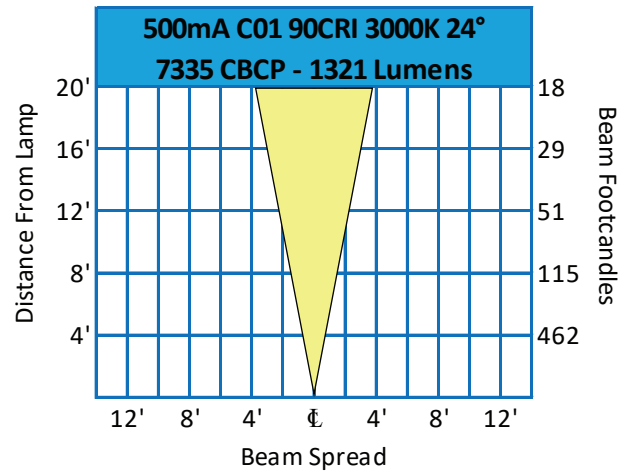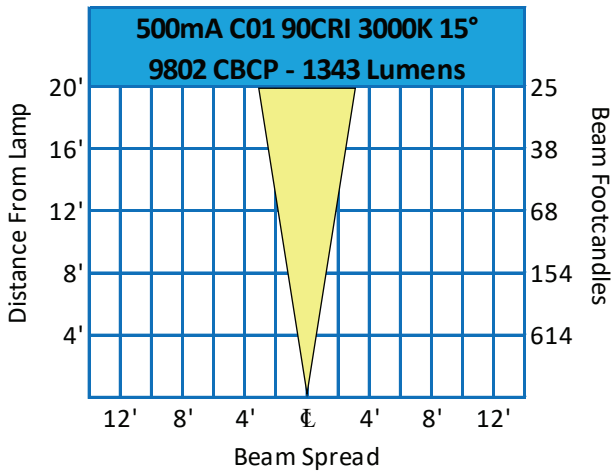






Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.09
	3000	1.14
	3500	1.16
	4000	1.18
>90	2700	0.94
	3000	1.00
	3500	1.02
	4000	1.06

Information subject to change without notice. See website or contact V3 for most current info.

## Photometric Overview

Information for 700mA C01 90 CRI 3000K Light Engine with C4 style cap. For more in depth photometric data, see website or contact Vision3 Lighting.

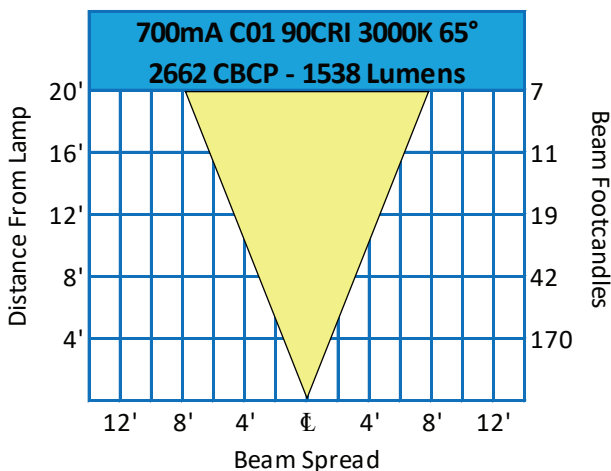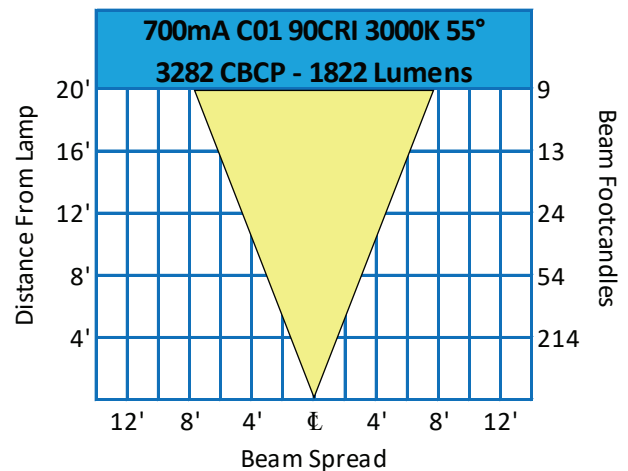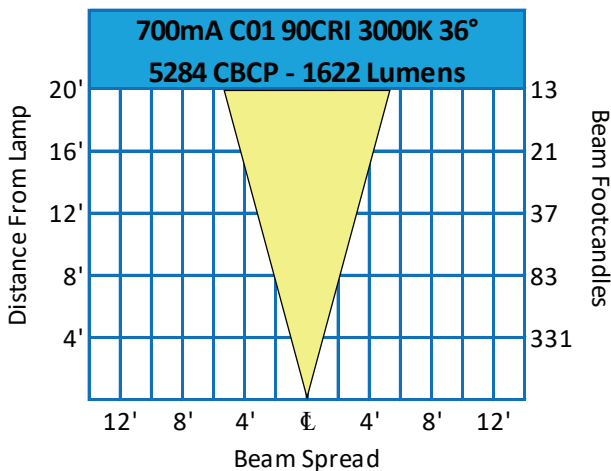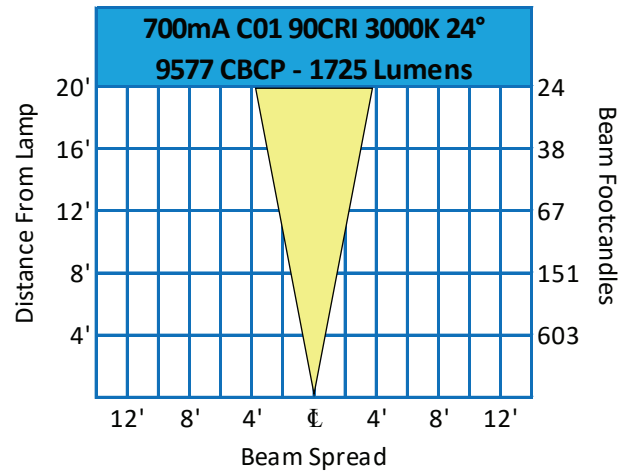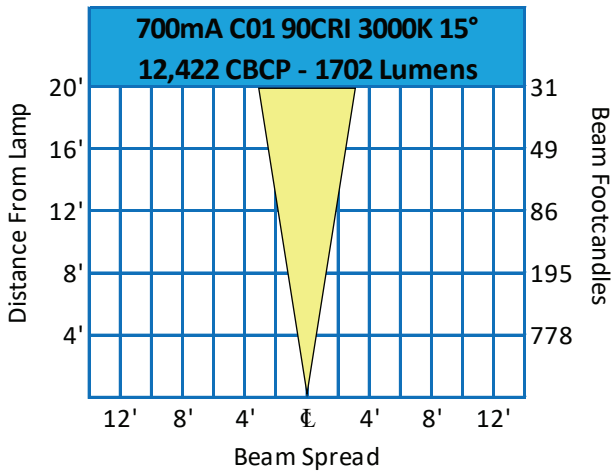

Scaling factors below can be used to estimate CBCP, Lumen Output, and Footcandles at available CRI and Color Temperatures.

CRI	Color Temperature	Scaling Factor
>80	2700	1.09
	3000	1.14
	3500	1.16
	4000	1.18
>90	2700	0.94
	3000	1.00
	3500	1.02
	4000	1.06

Information subject to change without notice. See website or contact V3 for most current info.