


New Product Notice

WM6 COB LED Dual Wall Mount Light

Precision machined aluminum, brass, or stainless-steel LED lighting fixture available with dual 12V Integral Driver COB LED light engines. Modular industry standard components allow for simple field replacement and future upgrades. Wet or dry location capable and certified for wall mount applications, the WM6 Dual Wall Mount fixture is perfect for all interior, exterior, residential, commercial, retail, and hospitality uses.

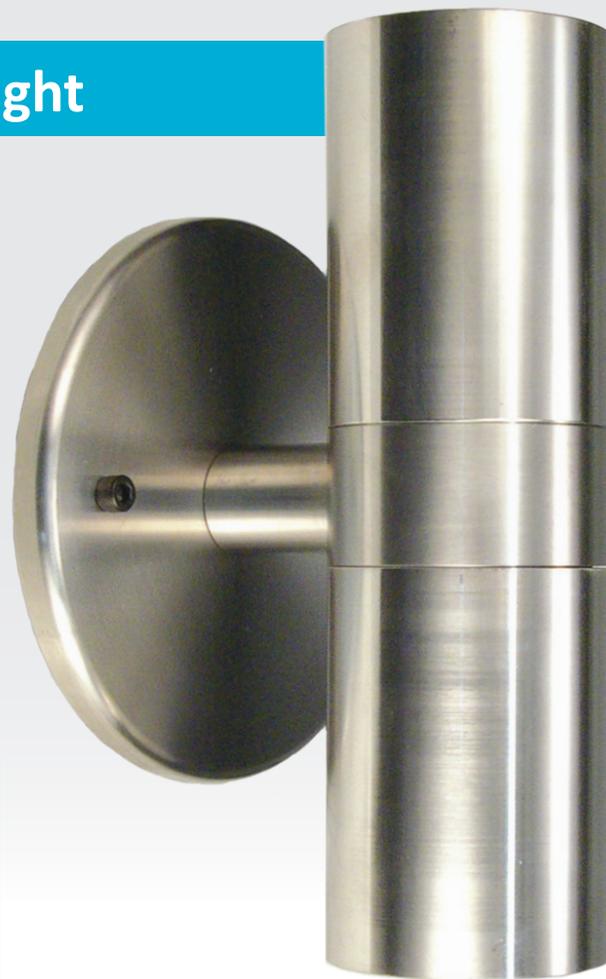

Features¹

- Industry standard COB LED components and wiring connectors to simplify maintenance and future upgrades.
- Field replaceable optics, COB's, and drivers.
- MR16 halogen, retro-fit MR16 LED, and amber turtle safe LED lamp options also available.
- High temperature silicone O-rings and molded silicone fixture lead seals to prevent leaking.
- Available in round and square shapes.
- Light engine in each head can be controlled independently.
- Tested and certified for wet or dry location use in interior or exterior wall mount applications.

Specifications¹

Integral Driver COB LED

- Input voltage: 12VAC
- Lumen Output (nominal)²: 400lm, 700lm, 1000lm each head.
- Optics: 15°, 24°, 36°, 55°, 65°.
- CCT: 2700K, 3000K, 3500K, 4000K.
- CRI: 80, 90.
- L70 > 40,000 hours.
- Dimming³: ELV & MLV phase dimming.

1. Features and Specifications subject to change without notice. Please see latest specification sheet(s) on website for latest information.
2. Lumen Output (nominal) is ideal lumen output of light engine only in lab conditions. Actual fixture output will vary with fixture/cap type, material, lens/optics options, CRI, CCT, mounting, orientation, and environmental conditions. For more accurate information, see fixture photometry files on website.
3. Contact Vision3 for dimmer compatibility and dimming range.