


## New Product Notice

### WM7 COB LED Dual Wall Mount Light

Precision machined aluminum or brass LED lighting fixture available with dual 120-277V Integral Driver or Remote Driver COB LED light engines. Modular industry standard components allow for simple field replacement and future upgrades. Wet or dry location capable and certified for wall mount applications, the WM7 Dual Wall Mount fixture is perfect for all interior, exterior, residential, commercial, retail, and hospitality uses.

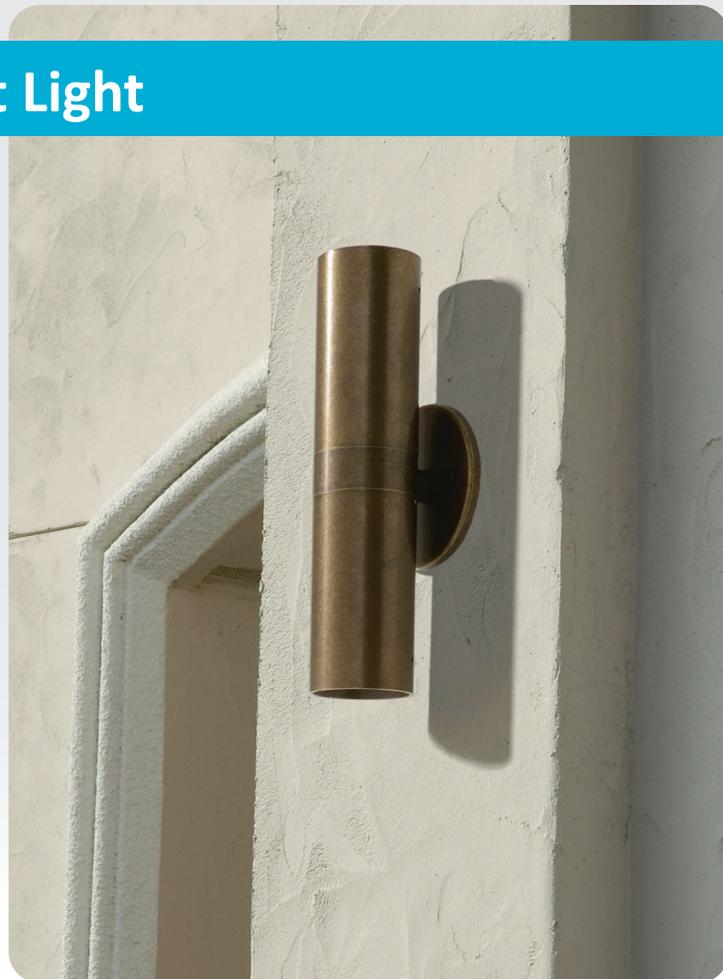

#### Features<sup>1</sup>

- Industry standard COB LED components and wiring connectors used to simplify maintenance and future upgrades.
- Field replaceable optics, COB's, and drivers.
- Thick walled caps, optimized high temperature silicone O-ring placement, and molded silicone fixture lead seals to prevent leaking.
- Available in round and square shapes.
- Regress caps allow for water drainage off of lens when pointed up.
- Tested and certified for wet or dry location use in interior or exterior wall mount applications.

#### Specifications<sup>1</sup>

##### Integral Driver COB LED

- Input voltage: 120-277VAC
- Lumen Output (nominal)<sup>2</sup>: 1200lm, 1600lm each head.
- Optics: 15°, 24°, 36°, 55°, 65°.
- CCT: 2700K, 3000K, 3500K, 4000K.
- CRI: 80, 90.
- L70 > 50,000 hours.
- Dimming<sup>3</sup>: Programmable tri-dimming (TRIAC, ELV, 0-10V) down to 1%.

##### Remote Driver COB LED

- Lumen Output (nominal)<sup>2</sup>:  
1800lm each head @ 350mA,  
2400lm each head @ 500mA,  
3200lm each head @ 700mA.
- Optics: 15°, 24°, 36°, 55°, 65°.
- CCT: 2700K, 3000K, 3500K, 4000K.
- CRI: 80, 90.
- L70 > 50,000 hours.
- Requires V3 dual driver mount.

1. Features and Specifications subject to change without notice. Please see latest specification sheet(s) on website for latest information.  
 2. Lumen Output (nominal) is ideal lumen output of light engine only in lab conditions. Actual fixture output will vary with fixture/cap type, material, lens/optics options, CRI, CCT, mounting, orientation, and environmental conditions. For more accurate information, see fixture photometry files on website.  
 3. Contact Vision3 for dimmer compatibility and dimming range.